

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 July 2004 (15.07.2004)


PCT

(10) International Publication Number
WO 2004/059538 A2

- (51) International Patent Classification⁷: G06F 17/50 CA 92673-6913 (US). SCHATTMAYER, Steven, M. [US/US]: 25142 Via Playa, Dana Point. CA 92629 (US).
- (21) International Application Number: PCT/US2003/039945 (74) Agents: MCDANIEL, Terry, B. et al.; MeadWest-vaco Corporation. Technical Center. P.O. Box 118005, Charleston, SC 29423-8005 (US).
- (22) International Filing Date: 16 December 2003 (16.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/433.597 16 December 2002 (16.12.2002) US
60/437.990 6 January 2003 (06.01.2003) US
60/449.601 26 February 2003 (26.02.2003) US
10/388.666 14 March 2003 (14.03.2003) US
- (71) Applicant (for all designated States except US): QUESTERRA CORPORATION [US/US]; 95 Enterprise, Suite #320, Aliso Viejo, CA 92656 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): VON KAENEL, Tim, A. [US/US]; 12 Lakeview, Coto De Caza, CA 92679 (US). GOODWIN, Jonathan, D. [US/US]; 30826 Calle Barbosa, Laguna Niguel, CA 92677 (US). STIER, Mark, A. [US/US]; 51 Calle Vista Del Sol, San Clemente,
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GR, GU, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM). European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR). OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: METHOD, SYSTEM AND PROGRAM FOR NETWORK DESIGN, ANALYSIS, AND OPTIMIZATION

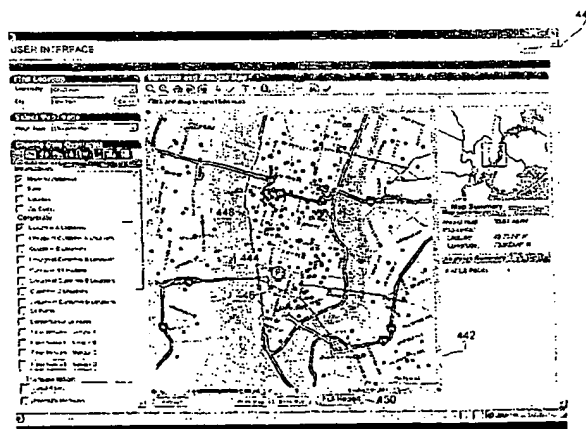

(57) Abstract: Provided are a method, system, and program for rendering information on network infrastructure. A selection of customer sites is received and a database is queried to determine geographical locations of the selected network sites. A graphical user interface is rendered including representations of the selected customer sites in a map at the geographical location of the selected sites in the map. Selection is received of at least one network service provider (NSP). The database is queried to determine network infrastructure of the selected NSP and geographical locations of the determined network infrastructure. Representations are rendered of the determined network infrastructure in a map at the determined geographical locations of the determined network infrastructure to render a visualization of the geographical locations of the selected customer sites and network infrastructure of the selected at least one NSP in the map.

BEST AVAILABLE COPY



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

JC20 Rec'd PCT/PTO 03 JUN 2005

METHOD, SYSTEM, AND PROGRAM FOR NETWORK
DESIGN, ANALYSIS, AND OPTIMIZATION

RELATED APPLICATIONS

5 This application is a non-provisional application claiming priority from the following applications:

U.S. Provisional Application No. 60/384,807, entitled "A SYSTEM AND METHOD AND COMPUTER PRODUCT FOR COUPLING A DATA PROCESSING CENTER TO A LIVE DATA PROCESSING CENTER TO
10 PROVIDE FOR SPATIALLY VIEWING, ANALYZING, AND SHARING ENTERPRISE DATA AND GEOSPATIAL DATA ACROSS MULTIPLE USERS," by T. von Kaenel et al., filed on March 16, 2002, and which is incorporated by reference herein in its entirety;

U.S. Provisional Application No. 60/433,597, entitled "SYSTEMS AND
15 METHODS FOR REAL-TIME EVALUATING AND REPORTING ASSOCIATED WITH INSURANCE POLICY UNDERWRITING AND RISK MANAGEMENT," by S. Kumar et al., filed on December 16, 2002, and which is incorporated by reference herein in its entirety;

U.S. Provisional Application No. 60/437,990, entitled "SYSTEMS AND
20 METHODS FOR REAL-TIME EVALUATING AND REPORTING ASSOCIATED WITH INSURANCE POLICY UNDERWRITING AND RISK MANAGEMENT," by S. Kumar et al., filed on January 6, 2003, and which is incorporated by reference herein in its entirety;

U.S. Provisional Application No. 60/449,601, entitled "SYSTEMS AND
25 METHODS FOR NETWORK DESIGN, ANALYSIS, AND OPTIMIZATION," by Tim A. von Kaenel, filed on February 26, 2003, and which is incorporated by reference herein in its entirety; and

is a Continuation-In-Part of U.S. Application No. 10/388,666, entitled
METHOD, SYSTEM, AND PROGRAM FOR AN IMPROVED ENTERPRISE
30 SPATIAL SYSTEM," by T. von Kaenel et al., filed on March 14, 2003, and which is incorporated by reference herein in its entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to method, system, and program for network design, analysis, and optimization.

5

2. Description of the Related Art

[0002] Businesses often seek the advice of network designers on ways to design, analyze and/or optimize network infrastructure. Such network infrastructure may make up any type of network, such as a local-area network (LAN), a home-area network (HAN), a campus-area network (CAN), a metropolitan-area network (MAN), and/or a wide area network (WAN), any of which may include one or more of a data network, a telecommunications network, a fiber optic network, a wireless network, as well as any other type of network. Moreover, such design, analysis, and/or optimization may involve creating a new network or modifying an existing network, such as by adding to and/or replacing a portion of the existing network.

10

[0003] In designing, analyzing, and/or optimizing a network, the network designer may have to identify the data-handling capacity and the cost of operating the business's desired (i.e., existing and/or proposed) network, the business's objectives and requirements for the desired network, and the network infrastructure and services that are available for designing and/or optimizing the desired network. The network designer may then design and price a network proposal that meets the network requirements.

20

[0004] Particularly challenging for the network designer is the task of identifying network service providers (NSPs) that provide network infrastructure and service (e.g., fiber optic service, wireless service, data service, telecommunications service, etc.) in a region of interest for a desired network. In many instances, a network designer may not know which NSPs service a particular region and what network infrastructure a particular NSP may provide in the region.

25

[0005] Currently, a business that wants to design, analyze, and/or optimize a network will identify the desired network for the network designer. This identification of the desired network may include a list of the addresses (e.g., mailing addresses) for the business locations on the desired network. The desired network connections may also be provided to the network designer, such as in the form of a list identifying the

30

network connection types (e.g., a T1 or a T3 connection) between identified pairs of addresses for the business locations on the network. With this data, the network designer may compute the capacity or bandwidth of the desired network, or a portion thereof, in any well-known manner.

- 5 [0006] Typically, with no more than this data, a network designer will contact the NSPs believed to serve a region encompassing the desired network to identify those NSPs that offer the desired network services. The network designer may contact each such NSP to describe the desired network and to request a proposal. The network designer then obtains the NSP offers, selects the best ones, and reports them to the
10 business for further consideration.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

- 15 FIG. 1 is a block diagram of a system in accordance with the present invention;

FIG. 2 is a flowchart diagram of a method in accordance with the present invention;

- 20 FIG. 3 illustrates a computing environment in accordance with embodiments of the invention;

FIGs. 4a, 4b, 4c, 5a, and 5b illustrate information maintained in a network design database in accordance with embodiments of the invention;

FIGs. 6, 8, 11, 13, 17, and 23 illustrate operations performed by the network design tool in accordance with embodiments of the invention; and

- 25 FIGs. 7, 9, 10, 12, 14-16, 18-22, and 24-26 illustrate examples of a graphical user interface rendering network information in accordance with embodiments of the invention.

DETAILED DESCRIPTION

- 30 [0008] In the following description, reference is made to the accompanying drawings which form a part hereof and which illustrate several embodiments of the present invention. It is understood that other embodiments may be utilized and structural and

operational changes may be made without departing from the scope of the present invention.

Identifying a Network Service Provider to use to
Provide Network Services for a Distributed Network

5 [0009] Systems and methods consistent with the present invention assist a network designer in evaluating NSPs according to their ability to cost-effectively provide network services in support of a desired network. To this end, the systems and methods consistent with the present invention may employ an NSP database, which
10 may include data to help a network designer in making such evaluations. For instance, the NSP database may include data representing user-selectable criteria that may be utilized by a network designer to evaluate each NSPs' ability to cost-effectively provide desired network services and to evaluate each NSPs' offer.

[0010] FIG. 1 illustrates an exemplary system 10 consistent with the present
15 invention. System 10 may include one or more client computers 12 for connection through a network 14, such as the internet, to a server 16, which may be connected to a database 18. Client computers 12 may comprise any conventional computer or other client device that may include software, such as a web browser, for accessing server 16. Similarly, server 16 may comprise any conventional server that may
20 execute any conventional software code for implementing the method depicted in FIG. 2.

[0011] As further described below, database 18, which may comprise one or more databases, includes data that may be used by a network designer to evaluate NSPs according to their ability to cost-effectively provide desired network infrastructure
25 and to evaluate each NSPs' offer. For example, database 18 may include data for conventionally displaying with a web browser on client computer 12 images, such as maps, which may simultaneously depict one or more of: 1) a business's desired network (e.g., addresses of business locations and their respective network connections for an existing network and/or a proposed network); 2) NSP
30 infrastructure (e.g., fiber optic lines, switches, cell towers, etc.) that may be used to provide the business's desired network; and 3) any other images or information that may be useful to a network designer in evaluating NSPs according to their ability to cost-effectively provide the desired network, such as geospatial data that may depict

images of roads, boundaries, rivers, etc., particularly in and around the area for the requested network.

[0012] FIG. 2 illustrates an exemplary method consistent with the present invention.

In step 20, a network designer may receive a network design request. In one instance, a business may ask the network designer to design a new network. Alternatively, a business may ask the network designer to determine whether some part or the whole of the business's existing network may be optimized, expanded, and/or replaced. For example, a business may ask the network designer to replace (or add to) a portion of the business's existing network with fiber optic infrastructure (e.g., fiber optic lines, switches, etc.) such that the completed network's system performance is improved (or at least not reduced) while operating costs are reduced (or maintained). Any conventional means of reporting the request to the network designer may be used, such as telephone conference, email, facsimile, and the like.

[0013] In step 22, the business may provide the network designer with data that may identify the desired network. Such data may include the addresses for business locations in the desired network, as well as network connections, such as a T1 or a T3 line, between identified pairs of business locations. The desired network may include addresses for business locations and network connections for: 1) an existing network that may be optimized; 2) an existing network that may be optimized and integrated with one or more additional proposed networks; or 3) a newly designed network. Any conventional means of reporting the desired network data to the network designer may be used, such as telephone conference, email, facsimile, and the like.

Alternatively, the network designer may research to assemble data that identifies the business's existing network infrastructure.

[0014] In step 24, the network designer may submit from client computer 12 to server 16 the network data reported at step 22 to identify the desired network (i.e., an existing network and/or a proposed network). For example, the network designer may submit to server 16 the network data in a flat file form or by entering the network data into a web form using client computer 12. Network data for submission to server 16 in a flat file form may be stored in client computer 12 in a CSV format (comma separated values) or any other suitable format. Network data for submission to server 16 by entering the data into a web form may be made available to server 16 using any conventional web hosting technology. In addition to providing the network data (e.g.,

business address locations and network connections for the desired network) to server 16, the network designer may use client computer 12 to add to, delete, or otherwise change the network data, either before or after having been provided to server 16.

[0015] In step 26, server 16 may employ one or more conventional programs to
5 perform the well-known geographic information system (GIS) processes of cleansing, validating, and geocoding the data identifying the desired network. To cleanse and geocode the desired network data, the Centrus AddressBroker product from Sagent Technology, Inc. of Mountain View, California may be used. Oracle version 9.1.0.4 with Spatial Extensions may be used to validate the desired network data in any
10 manner well known to those skilled in the art. However, those skilled in the art understand that any other conventional programs may be used to cleanse, validate, and geocode the data identifying the desired network. The GIS preparation (e.g., cleansing, validating, and geocoding) of the desired network data for display on client computer 12 may be automated in any well-known manner such that the business
15 locations for the desired network and their network connections may be viewed in an image, such as a map, on client computer 12. To facilitate such viewing, server 16 may also store in a database, such as database 18, at least the data for such network infrastructure.

[0016] Geocoding is a well-known GIS process that, among other things, may permit
20 displaying objects on a map. The geocoding process may associate with each business address provided in step 22 a latitude and a longitude value. Following such associations, a geocoded (as well as cleansed and validated) business address location may be queried using conventional GIS spatial queries to determine the address's location relative to the location of any object that may be represented by other
25 geocoded data sets that may be accessed by server 16. For example, using conventional GIS spatial queries, server 16 may determine the relative spatial positioning between two or more objects (e.g., between an address location and a point on an NSP's fiber optic line that may be considered for network service to the address location). Having determined the correct relative spatial positions between a
30 plurality of objects that may be represented with geocoded data, server 16 may correctly show the objects in an image, such as a map, on a client computer display.

[0017] At step 28, the network designer may identify for his further consideration a network that is the same as, smaller, or larger than the one specified by data received

in step 24 (i.e., the business address locations and network connections from step 24). For example, the network designer may identify a set of building locations, which may include all of the building locations submitted at step 24, less than all of these locations (if, for example, only a portion of the network was to be optimized), or more
5 than all of these locations. In addition to identifying the building locations for network designer consideration, the network connections may be identified by server 16 automatically selecting all of the network connections identified in step 24 that connect to any of the business locations selected in step 28. The set of building locations and network connections identified in step 28 may ultimately be contained
10 in a network proposal by the designer such that they are connected in a manner to enhance network efficiency, such as by replacing some or all of the prior network connections with lines having improved data-handling capacity (e.g., fiber optic).
[0018] The network data from step 24 (e.g., business locations and network connections) may be viewed by the network designer on a client computer display to
15 facilitate the identification of step 28. Geocoding of the network data may facilitate such viewing. Any conventional technique may be employed for this identification. For example, using client computer 12 the network designer may send server 16 conventional GIS spatial queries that would retrieve from database 18 the desired business locations and network connections. Alternatively, the network designer may
20 select from a menu of predefined identification options (e.g., select all of the business locations and network connections from step 24). Also, the network designer may use a graphical user interface (GUI), such as a mouse-driven pointer, to conventionally select one or more regions on the client computer display, the selected regions displaying the business locations and network connections that are to be the network
25 identified in step 28 for network designer consideration.
[0019] At step 30, server 16 may compute the total bandwidth requirements for the desired network identified in step 28. Those skilled in the art understand that this computation may be done in any one of several conventional ways that may utilize, as a factor, the bandwidth of the desired network, as identified at step 28, across the
30 building locations and network connections identified in step 28.
[0020] At step 32, the network designer may select one or more criteria to identify NSPs that may be able to provide the infrastructure needed to configure the desired network identified in step 28, pursuant to the requirements of the selected criteria.

The network designer may use a GUI, such as a mouse-driven pointer, to select from a set of predefined criteria shown on the client computer display. Client computer 12 may send the selected criteria to server 16, which may then access the NSP database to retrieve the NSPs that may fulfill the requirements of the selected criteria. In
5 retrieving the sought-after NSP data, server 16 may send conventional GIS spatial queries to the NSP database.

[0021] One such criteria may be used to identify NSPs that may provide fiber optic service, such as one or more fiber optic lines and fiber optic switches, to one or more building locations in the desired network of step 28. Alternatively, a selection criteria
10 may be used to identify NSPs that provide a predefined network service, such as fiber optic service, within a defined distance from one or more building locations in the desired network of step 28. For example, although a particular NSP may not provide fiber optic service to any building location identified in step 28, the NSP may provide fiber optic service within a defined distance of one or more of the identified building
15 locations (i.e., the NSP may have a fiber optic line less than a defined distance from a building location).

[0022] Those skilled in the art understand that there may be a number of other criteria that could be valuable to the network designer in endeavoring to evaluate NSPs according to their ability to cost-effectively design, analyze, and/or optimize a
20 business's desired network and to evaluate each NSPs' offer. For example, the network designer may find it useful to know: 1) how long specified NSPs have been offering a specified service; 2) the size of the customer base in a specified service for specified NSPs; 3) the total bandwidth offered by a specified NSP for a specified service; 4) the available bandwidth offered by a specified NSP for a specified service;
25 and 5) any other criteria that a network designer may find useful to identify NSPs for making such evaluations.

[0023] Accordingly, the NSP database, which may be a part of or separate from database 18, may include any of such criteria, which may be stored as conventionally cleansed, validated, and geocoded data. Any commercially available database with
30 such data may be used for the NSP database. For example, GeoTel, Inc. of Orlando, Florida provides GeoTel Data Sets called GeoTel Fiber, GeoTel Connect, GeoTel Exchange, GeoTel Networks, GeoTel Wireless, and GeoTel Analyst that include network infrastructure data for NSPs providing fiber optic, data, voice, and wireless

services. Regardless of whether a commercially available database that may be used for the NSP database is available from the manufacturer with cleansed, validated, and geocoded data, those skilled in the art understand that one or more conventional programs may be used to cleanse, validate, and geocode the NSP data. For example, to cleanse and geocode the NSP data, the Centrus AddressBroker product from Sagent Technology, Inc. of Mountain View, California may be used. Oracle version 9.1.0.4 with Spatial Extensions may be used to validate the NSP data in any manner well known to those skilled in the art. However, those skilled in the art understand that any other conventional programs may be used to cleanse, validate, and geocode the NSP data.

[0024] At step 34, the network designer may analyze one or more spatial views depicting network infrastructure for the NSPs identified in step 32 that may be used to fulfill the proposed network of step 28. The client computer display may provide a series of user-selectable viewing options for the network designer, such as viewing network infrastructure for one or more of the NSPs identified in step 32. For example, a list of NSPs identified in step 32 may be displayed on client computer 12 from which the network designer may select one or more to view the network infrastructure available to provide the desired network identified at step 28. Those skilled in the art understand that server 16 may use conventional GIS spatial queries to retrieve from the NSP database the requested spatial views of NSP infrastructure, such as a view that depicts the available fiber optic network infrastructure for an NSP that has fiber optic service available to one or more business locations identified at step 28. It will also be apparent to those skilled in the art that the data in the NSP database representing available NSP network infrastructure may be geocoded for displaying purposes.

[0025] At step 36, the network designer may request for the NSPs identified in step 32 a ranking of their ability to provide cost-effective service for the desired network. Client computer 12 may display a list of ranking criteria from which the network designer may select with a GUI, such as a mouse-driven pointer. To perform the requested ranking, server 16 may send conventional GIS spatial queries, as known to those skilled in the art, to database 18 to compare the network infrastructure of the NSPs identified in step 32 with the desired network of step 28.

[0026] For example, one ranking criteria may rate the NSPs identified in step 32 by determining for each such NSP the number of business locations identified in step 28 to which the NSP has network service, such as fiber optic service, already connected (i.e., the number of "hits"). For this exemplary ranking criteria, server 16 may display
5 on client computer 12 a list of the NSPs, arranged in order according to their respective number of "hits." An alternative criteria may be used to rank NSPs that provide a predefined network service, such as fiber optic service, within a defined distance from one or more building locations in the desired network of step 28.

[0027] Such rankings may be valuable to the network designer in evaluating the
10 NSPs, because they indicate for each NSP how many business locations in the desired network are already connected to, or within a defined distance of, a sought-after networking service, such as fiber optic service. For example, if the network designer knows that a particular NSP has the most fiber optic service "hits" to or near business locations in the desired network, then the designer may conclude that that NSP
15 should, with all other factors being equal, be able to provide the most cost-effective quotation. The network designer may reach such a conclusion because the NSP that provides the requested network service, such as fiber optic service, to or near to the most business locations does not have to spend as much money (and pass it along in their quotation to the network designer) to establish new fiber optic connections.

[0028] At step 38, the network designer may spatially view on the client computer display the network infrastructure available from a specified NSP for servicing the desired network identified in step 28. Client computer 12 may display a list of the NSPs identified in step 32, such as an NSP ranking list from step 36. Using a GUI, such as a mouse-driven pointer, the network designer may select one or more of the
25 listed NSPs. Server 16 may then use conventional GIS spatial queries to database 18 to retrieve for display on client computer 12 the selected network infrastructure, such as a particular NSP's fiber optic network infrastructure for servicing the desired network identified in step 28.

[0029] In step 38, the network designer may also select with a GUI, such as a mouse-driven pointer, an option for server 16 to generate and display one or more reports that may contain: 1) a spatial view of the complete set of building locations (from step 24); 2) a spatial view of the desired network (from step 28); 3) the bandwidth requirement for the desired network (from step 30); 4) a spatial view of the building

locations with "hits" (whether they be direct "hits" to a building location or "hits" within a defined distance of a building location) for a specified NSP, such as the NSP capable of providing the most cost-effective service quotation (from step 36); and 5) a spatial view of the network infrastructure for the desired network from a specified NSP, such as the NSP capable of providing the most cost-effective service quotation (from step 38).

[0030] In step 40, the network designer may annotate any of the reports from step 38. For example, the network designer may use a client computer GUI, such as a mouse-driven pointer and/or a keyboard, to instruct server 16 to incorporate text, such as a title and a subtitle for a report, shapes, such as arrows to specified areas in a spatial view of a report, or any other information that the network designer wishes to incorporate into a report.

[0031] In step 42, the network designer may use client computer 12 to direct server 16 to save on database 18 any of the results from the analysis that was performed or any of the reports that were generated for sharing, at step 44, with a customer, other consultants, or any other interested party.

[0032] It will be apparent to those skilled in the art that various modifications and variations can be made to the system and method of the present invention without departing from the spirit or scope of the invention. For example, although aspects of the present invention may be described as replacing existing network infrastructure with a fiber optic network, one skilled in the art will appreciate that systems and methods consistent with the present invention may also be employed to create, optimize, expand, and/or replace desired network infrastructure using non-fiber optic networks, such as wireless networks, traditional data networks, telecommunications networks, etc. The present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims, or any subsequently-filed claims, and their equivalents.

Network Design Tool

[0033] FIG. 3 illustrates a computing environment in which embodiments may be implemented. A client system 100, which may comprise any computing device known in the art, such as a workstation, desktop computer, laptop computer, hand held computer, server, telephony device, etc. The client 100 includes a network design

tool 102 to enable an administrator to design their network infrastructure and select NSPs to use to provide the network connections, including entry/exit points in buildings, protocols to use, fiber connections, etc. The network design tool 102 would render a user interface 104, which may comprise a graphical user interface (GUI), to enable a user to interact with a network design database 106 having information on network infrastructure available through recognized NSPs. The network design tool 102 may query the network design database 106 to determine information on NSP network infrastructure within a specified geographical location and the location of customer sites that will need to link to the existing NSP network infrastructure. The client 100 may access the network design database 106 over a network 108, such as a Local Area Network (LAN), Wide Area Network (WAN), the Internet, and Intranet, etc. Alternatively, the client 100 may be directly connected to the system implementing the network design database 106. The network design database 106 may implement any data store architecture known in the art, such as a relational database, non-relational database, etc.

[0034] The client 100 includes a client data manager 110, which is used to upload client information for a user to the network design database 106. The network design tool 102 may utilize a database client program to submit queries to a database server controlling access to the network design database 106 to access and update the data therein.

[0035] FIGs. 4a, 4b, and 4c illustrate examples of data structures including information on NSP network infrastructure maintained in the network design database 106. FIG. 4a illustrates NSP information 120 maintained for each NSP for which network infrastructure information is available. The NSP information 120 for one NSP includes an NSP identifier 122, a switch list 124 identifying the one or more switches deployed by that NSP and a path list 126 providing information on the geographical location of one or more network routes made available by the NSP that are accessible through the switches identified in the switch list 124.

[0036] FIG. 4b illustrates switch information 130 providing information on each switch identified in the switch lists 124 in the NSP information records 120. The switch information 130 for a switch includes a switch identifier 132, such as a unique world wide name or serial number, a switch geographical location 134, e.g., latitude

and longitude, and switch bandwidth 136 indicating the network bandwidth available through that switch.

[0037] FIG. 4c illustrates path information 140 providing information on each path or network route identified in the path list 126 of the NSPs. A network path may
5 comprise cables, wires, optical fiber, copper wire or a wireless network, e.g., "hot zone", covering a defined geographic region. The path information 140 for a switch includes: a path (route) identifier 142; a list 144 of the switches along the route of the path, a geographical route 146 comprising spatial and geographical information identifying the physical route of the network path or area, which may include the
10 multiple points or a radius defining the geographical route or area of the path; and the path bandwidth 148 indicating the network bandwidth available through that path.

[0038] The available infrastructure offered by an NSP would be defined by the switches and paths provided by that NSP as indicated in the switch 130 and path 140 information in the network design database 106. Additional information on the NSP
15 network infrastructure may also be provided.

[0039] The network design database 106 would further include information on users authorized to access the network design database and groups of customer locations maintained for that user. FIG. 5a illustrates a user data record 150 including: a user
20 identifier (ID) 152, which may also include a password to authorize access; a customer list 154 including multiple customers for that user, where each customer is a grouping associated with one or more customer sites potentially needing network access; and other user information 156, such as settings or preferences of a user.

[0040] FIG. 5b illustrates the customer information 160, where there is customer information 160 for every customer identified in the customer list 154 for the users.
25 The customer information 160 includes: a customer identifier 162, which may include descriptive information; customer sites 164 indicating one or more customer sites requiring network access, including longitude and latitude information of each site; site connections 166 indicating connections between the customer sites; site information 168 including information on the site, such as network bandwidth, street
30 address, users at site, etc.; and location connection information 170 providing information on the connections between the sites, such as bandwidth, etc.

[0041] FIG. 6 illustrates operations performed by the network design tool 102 program to initiate a user session to access information in the network design database

106. Upon the user initiating a session (at block 200), the network design tool 102 determines (at block 202) the customer list 154 from the user data 150 for the user initiating the session and determines from the customer information 160 for each customer identified in the determined customer list 154 all customer site locations. A geographical region encompassing all determined customer site locations is determined (at block 204). A street map including the determined geographical region is then accessed (at block 206). The network design database 106 may include a street map database or the street map may be accessed from another street mapping program. The accessed street map region is rendered (at block 208) in a map section of the user interface 104, such as the map section 202 shown in the GUI 206 of FIG. 7. The map section 202 may display all or a portion of the accessed street map region accessible through scrolling user interface elements.

[0042] A selection box is then displayed (at block 210) for each customer in the user customer list 154 in the user interface 104, such as the displayed section 204 of the user interface 300 listing each customer in the customer list for the user and a check box next to each customer name to enable selection of that customer, where each customer is capable of being associated with one or more customer sites. The network design tool 102 may query (at block 212) the NSP information 120 (FIG. 4a) for each NSP included in the network design database 106 to determine those NSPs having switches in the determined geographic region, based on the switch location information 134 in the switch information 130. The name of each NSP having a switch in the determined geographic region is then rendered along with a check box enabling selection of the NSP. The user interface 200 of FIG. 7 shows a display region 206 listing NSPs providing fiber or network resources, including switches and paths, within the determined geographic region.

[0043] FIG. 8 illustrates operations performed by the network design tool 102 to render information in the user interface 104 on the customer sites. Upon receiving (at block 250) user selection of a customer, which may be made by selecting one of the customer check boxes shown in the region 204 of the user interface 200 (FIG. 7), a determination is made (at block 252) of all customer site locations for the selected customer from the customer site 164 information in the customer information 160 (FIG. 5b). A graphic representation of all the determined customer sites is rendered (at block 206) at the customer geographic locations shown in the map region. FIG. 9

illustrates a user interface 270 whose map region 272 displays the customer sites in the street map as small darkened circles, e.g., 274, thereby allowing identification of the customer sites for a selected customer, which in user interface 270 is "Customer A" 276.

5 [0044] Fig. 10 illustrates a user interface 280 showing information that is displayed when a user selects a site location in the map region 282 and then selects to display information on that site in dialog box 284, such as by selecting an icon or menu item from the user interface 280. The rendered site information 284 may be accessed from the site information 168 for that customer site in the customer information 160 (FIG.
10 5b) in the database 106.

[0045] FIG. 11 illustrates operations performed by the network design tool 102 to render linkages between the customer sites in the user interface 104. Upon receiving (at block 300) user selection of a "show linkages" box for a listed customer, a determination is made (at block 302) of the connections between all the customer sites
15 of the selected customer and lines are rendered (at block 304) illustrating the determined connections between the selected customer sites.

[0046] FIG. 12 illustrates a user interface 310 showing in the map region 312 the determined connections, e.g., 314, between the customer sites for Customer A, where the selection box to cause the display of the sites for customer A and the linkages of
20 customer A are shown as elements 314 and 316, respectively.

[0047] FIG. 13 illustrates operations performed by the network design tool 102 to perform a query related to the customer connections to determine information thereon. Upon initiating (at block 350) a query of customer connections, a query box is rendered (at block 352) including selectable fields in which a user can select and enter
25 search criteria on parameters to query. The network design tool 102 would then initiate a query (at block 354) of the site 164 or connection 166 information to determine site locations or connections satisfying the search criteria. The location or connections resulting from the query are rendered (at block 356) differently in the map region to indicate they are query results.

30 [0048] FIG. 14 illustrates a user interface 360 showing the display of a query box 362 in which the user may select parameters and search criteria on which to query. For instance, the user may select to query on switch type and/or a specific geographical

location, such as city, zip code, street, etc., and enter or select the search criteria of the query parameters in the query box 362.

[0049] FIG. 15 illustrates a user interface 370 showing the rendering of the connections resulting from the query in a different manner than other connections.

- 5 For instance, in the map region 372, the connections satisfying the query parameters, such as connections which would use a certain switch type, e.g., Optical Carrier 3 (OC3), have a certain bandwidth, etc., are rendered with a dashed line, e.g., 374, whereas connections that do not satisfy the query are rendered differently, such as with a solid line, e.g., 376.

- 10 [0050] FIG. 16 illustrates a user interface panel 380 displaying a dialog box 382 including information on a connection, which would be rendered in response to the user selecting a displayed connection and then selecting to display information on the selected connection, where the information rendered in the dialog box 382 would be accessed from the connection information 170 (FIG. 5b).

- 15 [0051] FIG. 17 illustrates operations the network design tool 102 performs to allow the user to obtain information on NSP network infrastructure available at customer sites. The user would select (at block 400) one or more displayed customer sites and enter information (at block 402) defining a buffer region for the selected site, where the buffer specifies a region, such as a radius, around a site location to consider for
20 available NSP infrastructure. The network design tool 102 then queries (at block 404) the switch information 130 to find all switches whose geographic location 134 (FIG. 4b) falls within the boundaries of the buffer defined around one of the selected customer sites. All determined switch locations are rendered (at block 406) in the map region in manner different than the customer sites are rendered to distinguish the
25 two. All the determined switch locations in a buffer are rendered (at block 408) in the map region as contained within the buffer region in a manner different than the switch locations that do not fall within one buffer region.

- [0052] The buffers would identify those NSP switches that the network designer may select to use as the network infrastructure for the selected customer sites, i.e., that
30 network infrastructure with a defined geographic proximity (within the buffer) to NSP network infrastructure..

[0053] FIG. 18 illustrates a user interface 420 having a dialog box 422 in which the user enters a buffering distance 424, a unit measurement 426 of the buffer distance, a

color 428 in which to render the buffer region, and a manner in which to render the representations of the switches that fall within the buffer region 428, e.g., lighted points, etc.

5 [0054] FIG. 19 illustrates a user interface 440 including a map region 442 in which is displayed a buffer region, represented by circle 444, including switch sites displayed lit 446, as opposed to switch sites displayed outside of the buffer region 444 shown as darkened boxes, e.g., 448. The user may select a "full report" button 450 to generate a report on all the switches that fall within the buffers around the selected customer sites.

10 [0055] FIG. 20 illustrates an example of the full report rendered in user interface 460 including information on all the switches that are located within the selected buffer regions of the selected customer sites. The report would include information identifying the switch, such as the NSP 462, the geographical location 464 in terms of longitude and latitude, and the distance from the customer site 466. The network
15 designer may review this full report to determine a switch and NSP to use to connect to from the customer site.

[0056] FIG. 21 illustrates a user interface 470 rendering the network connections between the switch sites for a selected vendor, which in user interface 470 is the vendor 472. The network connections between NSP switches would be rendered as
20 overlaid over the rendering of the transportation corridors or other rendered points-of-interest in the map. Number 472 identifies a rendered connection and number 474 identifies a rendered street in the map region 476. The rendered connections may be displayed darker and overlaid over the rendered transportation corridors. This allows the network designer to visualize the route of the connections for the selected NSP
25 overlaid with respect to the street layout of the map.

[0057] FIG. 22 illustrates a user interface 490 showing a zoom view of a customer site, shown as triangle 492, which provides greater detail as to the street location, and shows other switches, e.g., 494 and other customer sites, e.g., 496, within the displayed buffer region 498. User interface 490 further shows a line 500 the network
30 designer would have added from one switch 502 in the buffer 498 and the zoomed customer site 492, which would further visualize information on such a proposed connection, such as the distance.

- [0058] FIG. 23 shows operations the network design tool 102 may perform to assist the user in visualizing different network design options. Upon initiating (at block 520) the design operations to design a network, such as a Metropolitan Area Network, (MAN)/Wide Area Network (WAN), the network design tool 102 receives (at block 522) user selection of customer sites to consider as nodes in the network being designed. The user selected customer sites are rendered (at block 524) differently than non-selected customer sites. The buffer region definition is further received (at block 526), which may be entered through a dialog box such as shown as box 422 in FIG. 18. The switch information 132 for all switches are queried (at block 528) to locate all switch locations in the buffer regions for the selected sites. All determined switch locations are rendered (at block 530) on the map in a manner different than the rendering of the customer sites. The switch locations are further rendered (at block 532) within the rendered buffer regions in a different manner than the switch locations outside of the buffer regions.
- [0059] FIG. 24 illustrates a user interface 550 including four selected customer sites, e.g., 552, and lines, e.g., 554, drawn between the sites illustrating a network ring that may be formed for the selected customer sites.
- [0060] Fig. 25 illustrates a user interface 560 including buffers, e.g., 562, rendered around each of the selected customer sites.
- [0061] FIG. 26 illustrates a user interface 570 showing a report of all the switches and their NSPs that fall within the buffer region of each of the selected customer sites, including the switch ID 572, the switch NSP 574, and the customer site address 576, as well as other information that would assist the network designer in designing a network.
- [0062] The described network design tool enables a network designer to visualize customer sites, NSP network infrastructure and the relationship therebetween to provide information the network designer may then use to select optimal network infrastructure from the determined best possible NSPs. The rendered information allows network designers to make a comprehensive assessment and analysis of network infrastructure available for use with their network nodes.

Additional Embodiment Details

[0063] The described network design tool may be implemented as a method, apparatus or article of manufacture using standard programming and/or engineering techniques to produce software, firmware, hardware, or any combination thereof. The term "article of manufacture" as used herein refers to code or logic implemented in hardware logic (e.g., an integrated circuit chip, Programmable Gate Array (PGA), Application Specific Integrated Circuit (ASIC), etc.) or a computer readable medium, such as magnetic storage medium (e.g., hard disk drives, floppy disks, tape, etc.), optical storage (CD-ROMs, optical disks, etc.), volatile and non-volatile memory devices (e.g., EEPROMs, ROMs, PROMs, RAMs, DRAMs, SRAMs, firmware, programmable logic, etc.). Code in the computer readable medium is accessed and executed by a processor. The code in which preferred embodiments are implemented may further be accessible through a transmission media or from a file server over a network. In such cases, the article of manufacture in which the code is implemented may comprise a transmission media, such as a network transmission line, wireless transmission media, signals propagating through space, radio waves, infrared signals, etc. Thus, the "article of manufacture" may comprise the medium in which the code is embodied. Additionally, the "article of manufacture" may comprise a combination of hardware and software components in which the code is embodied, processed, and executed. Of course, those skilled in the art will recognize that many modifications may be made to this configuration without departing from the scope of the present invention, and that the article of manufacture may comprise any information bearing medium known in the art.

[0064] FIGs. 4a, 4b, 4c and 5a, 5b illustrate examples of data structures that maintain information on customer sites and NSP network infrastructure. This information may be maintained in a format different than shown. Further, additional information may be provided for the customer sites and NSP resources.

[0065] Certain figures, such as FIGs. 7, 9, 10, 12, 14-16, 18-22, 24, 25, and 26, depict a GUI interface with the map region and selectable customers and vendors in a particular orientation. In alternative embodiments, the arrangement of the GUI may differ and include different, less or more information than shown.

[0066] The described embodiments discussed allowing a network designer to query and render information on customer sites, NSP switches, and NSP paths. Additional

information on the NSP resources and customer sites may additionally be provided and stored in the network design database.

[0067] The illustrated logic of FIGs. 1, 6, 8, 11, 13, 17, and 23 show certain events occurring in a certain order. In alternative embodiments, certain operations may be performed in a different order, modified or removed. Moreover, steps may be added to the above described logic and still conform to the described embodiments. Further, operations described herein may occur sequentially or certain operations may be processed in parallel. Yet further, operations may be performed by a single processing unit or by distributed processing units.

[0068] FIG. 27 illustrates one implementation of a computer architecture 600 of the network components shown in FIGs. 1 and 3, such as in the clients, server, database, etc. The architecture 600 may include a processor 602 (e.g., a microprocessor), a memory 604 (e.g., a volatile memory device), and storage 606 (e.g., a non-volatile storage, such as magnetic disk drives, optical disk drives, a tape drive, etc.). The storage 606 may comprise an internal storage device or an attached or network accessible storage. Programs in the storage 606 are loaded into the memory 604 and executed by the processor 602 in a manner known in the art. The architecture further includes a network card 608 to enable communication with a network. An input device 610 is used to provide user input to the processor 602, and may include a keyboard, mouse, pen-stylus, microphone, touch sensitive display screen, or any other activation or input mechanism known in the art. An output device 612 is capable of rendering information transmitted from the processor 602, or other component, such as a display monitor, printer, storage, etc.

[0069] The foregoing description of various embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be limited not by this detailed description, but rather by the claims appended hereto. The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

WHAT IS CLAIMED IS:

1 1. A method, comprising:
2 receiving a selection of customer sites;
3 querying a database to determine geographical locations of the selected network
4 sites;
5 rendering, in a graphical user interface, representations of the selected customer
6 sites in a map at the geographical location of the selected sites in the map;
7 receiving selection of at least one network service provider (NSP);
8 querying the database to determine network infrastructure of the selected NSP and
9 geographical locations of the determined network infrastructure; and
10 rendering representations of the determined network infrastructure in a map at the
11 determined geographical locations of the determined network infrastructure to render a
12 visualization of the geographical locations of the selected customer sites and network
13 infrastructure of the selected at least one NSP in the map.

1 2. The method of claim 1, wherein the determined network infrastructure
2 comprises at least one of a switch and a network path, and wherein the network
3 infrastructure geographical location comprises at least one of a switch site location and a
4 route of the network path.

1 3. The method of claim 1, wherein the map comprises a street map, and
2 wherein the rendered map visualizes transportation corridors, and wherein the rendered
3 customer sites and network infrastructure are visualized superimposed over rendered
4 transportation corridors in the street map.

1 4. The method of claim 1, further comprising:
2 receiving user selection of one rendered customer site;
3 querying the database to determine information on the selected customer site; and
4 rendering the determined information on the selected customer site in a dialog
5 box.

1 5. The method of 1, further comprising:
2 querying connection information in the database to determine connections
3 between the rendered customer sites; and
4 rendering connections between the customer sites in the map to visualize the
5 determined connections.

1 6. The method of claim 5, further comprising:
2 receiving a query including search criteria with respect to a parameter concerning
3 network connectivity at the customer sites;
4 querying the database to determine connections between customer sites having
5 network connectivity information satisfying the search criteria included with the query;
6 and
7 rendering the determined connections in a different visual manner than those
8 connections that do not satisfy the search criteria.

1 7. The method of claim 5, wherein the connection information includes
2 information on at least one of connected sites, connection bandwidth, and connection
3 circuit types.

1 8. The method of claim 1, further comprising:
2 receiving a definition of a buffer region with respect to a selected customer site;
3 querying the database to determine NSP network infrastructure located within the
4 defined buffer region;
5 rendering the buffer region around the rendering of the selected customer site in
6 the map; and
7 rendering the determined NSP network infrastructure within the defined buffer
8 region in the map.

1 9. The method of claim 8, wherein NSP network infrastructure rendered
2 within the defined buffer region is rendered differently than NSP network infrastructure
3 rendered outside of the buffer region.

1 10. The method of claim 8, further comprising:
2 generating a report identifying at least one of: the network infrastructure located
3 within the buffer region, the NSP managing the identified network infrastructure, and a
4 distance of the identified network infrastructure from the selected customer site for which
5 the buffer region is defined.

1 11. The method of claim 1, wherein the network infrastructure includes
2 network switches and network paths, wherein rendering the representations of the
3 determined network infrastructure comprises rendering representations of the determined
4 switches in the map, further comprising:
5 querying the database to determine network paths between the network switches
6 rendered in the map; and
7 rendering the network paths between the network switches in the map.

1 12. The method of claim 11, wherein the map comprises a street map, and
2 wherein the network paths are rendered superimposed over transportation corridors
3 rendered on the map.

1 13. The method of claim 11, further comprising:
2 receiving user selection of a proposed path between the customer site and one
3 network switch;
4 rendering the proposed path in the map; and
5 generating and rendering information on the proposed path in the map, including
6 information on the distance of the proposed path.

1 14. The method of claim 1, further comprising:
2 receiving selection of a plurality of customer sites rendered in the map;
3 receiving a definition of parameters of a buffer region with respect to the selected
4 customer sites;
5 determining buffer regions for each of the selected customer sites satisfying the
6 defined parameters for the buffer region;

7 querying the database to determine NSP network infrastructure located within
8 each determined buffer region;
9 rendering each determined buffer region around each selected customer site in the
10 map; and
11 rendering the determined NSP network infrastructure within each defined buffer
12 region in the map.
13

1 15. The method of claim 14, further comprising:
2 generating a report identifying at least one of: the network infrastructure located
3 within the determined buffer regions; the NSPs managing the identified network
4 infrastructure within the determined buffer regions; and, for each selected customer site, a
5 distance of the identified network infrastructure from the selected customer site within
6 the buffer region for the selected customer site.

1 16. A system, comprising:
2 a processor;
3 an output device in communication with the processor;
4 code executed by the processor to cause the processor to perform:
5 (i) receiving a selection of customer sites;
6 (ii) querying a database to determine geographical locations of the selected
7 network sites;
8 (iii) rendering, in a graphical user interface, representations of the selected
9 customer sites in a map at the geographical location of the selected sites in the
10 map;
11 (iv) receiving selection of at least one network service provider (NSP);
12 (v) querying the database to determine network infrastructure of the
13 selected NSP and geographical locations of the determined network
14 infrastructure; and
15 (vi) rendering representations of the determined network infrastructure in
16 a map at the determined geographical locations of the determined network

17 infrastructure to render a visualization of the geographical locations of the
18 selected customer sites and network infrastructure of the selected at least one NSP
19 in the map.

1 17. The system of claim 16, wherein the determined network infrastructure
2 comprises at least one of a switch and a network path, and wherein the network
3 infrastructure geographical location comprises at least one of a switch site location and a
4 route of the network path.

1 18. The system of claim 16, wherein the map comprises a street map, and
2 wherein the rendered map visualizes transportation corridors, and wherein the rendered
3 customer sites and network infrastructure are visualized superimposed over rendered
4 transportation corridors in the street map.

1 19. The system of claim 16, wherein the code further causes the processor to
2 perform:
3 receiving user selection of one rendered customer site;
4 querying the database to determine information on the selected customer site; and
5 rendering the determined information on the selected customer site in a dialog
6 box.

1 20. The system of claim 16, wherein the code further causes the processor to
2 perform:
3 querying connection information in the database to determine connections
4 between the rendered customer sites; and
5 rendering connections between the customer sites in the map to visualize the
6 determined connections.

1 21. The system of claim 20, wherein the code further causes the processor to
2 perform:

3 receiving a query including search criteria with respect to a parameter concerning
4 network connectivity at the customer sites;
5 querying the database to determine connections between customer sites having
6 network connectivity information satisfying the search criteria included with the query;
7 and
8 rendering the determined connections in a different visual manner than those
9 connections that do not satisfy the search criteria.

1 22. The system of claim 16, wherein the connection information includes
2 information on at least one of connected sites, connection bandwidth, and connection
3 circuit types.

1 23. The system of claim 16, wherein the code further causes the processor to
2 perform:
3 receiving a definition of a buffer region with respect to a selected customer site;
4 querying the database to determine NSP network infrastructure located within the
5 defined buffer region;
6 rendering the buffer region around the rendering of the selected customer site in
7 the map; and
8 rendering the determined NSP network infrastructure within the defined buffer
9 region in the map.

1 24. The system of claim 23, wherein NSP network infrastructure rendered
2 within the defined buffer region is rendered differently than NSP network infrastructure
3 rendered outside of the buffer region.

1 25 The system of claim 24, wherein the code further causes the processor to
2 perform:
3 generating a report identifying at least one of: the network infrastructure located
4 within the buffer region, the NSP managing the identified network infrastructure, and a

5 distance of the identified network infrastructure from the selected customer site for which
6 the buffer region is defined.

1 26. The system of claim 16, wherein the network infrastructure includes
2 network switches and network paths, wherein rendering the representations of the
3 determined network infrastructure comprises rendering representations of the determined
4 switches in the map, and wherein the code further causes the processor to perform:
5 querying the database to determine network paths between the network switches
6 rendered in the map; and
7 rendering the network paths between the network switches in the map.

1 27. The system of claim 26, wherein the map comprises a street map, and
2 wherein the network paths are rendered superimposed over transportation corridors
3 rendered on the map.

1 28. The system of claim 26, wherein the code further causes the processor to
2 perform:
3 receiving user selection of a proposed path between the customer site and one
4 network switch;
5 rendering the proposed path in the map; and
6 generating and rendering information on the proposed path in the map, including
7 information on the distance of the proposed path.

1 29. The system of claim 16, wherein the code further causes the processor to
2 perform:
3 receiving selection of a plurality of customer sites rendered in the map;
4 receiving a definition of parameters of a buffer region with respect to the selected
5 customer sites;
6 determining buffer regions for each of the selected customer sites satisfying the
7 defined parameters for the buffer region;

8 querying the database to determine NSP network infrastructure located within
9 each determined buffer region;
10 rendering each determined buffer region around each selected customer site in the
11 map; and
12 rendering the determined NSP network infrastructure within each defined buffer
13 region in the map.
14

1 30. The system of claim 16, wherein the code further causes the processor to
2 perform:

3 generating a report identifying at least one of: the network infrastructure located
4 within the determined buffer regions; the NSPs managing the identified network
5 infrastructure within the determined buffer regions; and, for each selected customer site, a
6 distance of the identified network infrastructure from the selected customer site within
7 the buffer region for the selected customer site.

1 31. An article of manufacture for causing operations to be performed, wherein
2 the operations comprise:

3 receiving a selection of customer sites;
4 querying a database to determine geographical locations of the selected network
5 sites;
6 rendering, in a graphical user interface, representations of the selected customer
7 sites in a map at the geographical location of the selected sites in the map;
8 receiving selection of at least one network service provider (NSP);
9 querying the database to determine network infrastructure of the selected NSP and
10 geographical locations of the determined network infrastructure; and
11 rendering representations of the determined network infrastructure in a map at the
12 determined geographical locations of the determined network infrastructure to render a
13 visualization of the geographical locations of the selected customer sites and network
14 infrastructure of the selected at least one NSP in the map.

1 32. The article of manufacture of claim 31, wherein the determined network
2 infrastructure comprises at least one of a switch and a network path, and wherein the
3 network infrastructure geographical location comprises at least one of a switch site
4 location and a route of the network path.

1 33. The article of manufacture of claim 31, wherein the map comprises a
2 street map, and wherein the rendered map visualizes transportation corridors, and
3 wherein the rendered customer sites and network infrastructure are visualized
4 superimposed over rendered transportation corridors in the street map.

1 34. The article of manufacture of claim 31, wherein the operations further
2 comprise:
3 receiving user selection of one rendered customer site;
4 querying the database to determine information on the selected customer site; and
5 rendering the determined information on the selected customer site in a dialog
6 box.

1 35. The article of manufacture of claim 31, wherein the operations further
2 comprise:
3 querying connection information in the database to determine connections
4 between the rendered customer sites; and
5 rendering connections between the customer sites in the map to visualize the
6 determined connections.

1 36. The article of manufacture of claim 35, wherein the operations further
2 comprise:
3 receiving a query including search criteria with respect to a parameter concerning
4 network connectivity at the customer sites;
5 querying the database to determine connections between customer sites having
6 network connectivity information satisfying the search criteria included with the query;
7 and

8 rendering the determined connections in a different visual manner than those
9 connections that do not satisfy the search criteria.

1 37. The article of manufacture of claim 35, wherein the connection
2 information includes information on at least one of connected sites, connection
3 bandwidth, and connection circuit types.

1 38. The article of manufacture of claim 31, wherein the operations further
2 comprise:
3 receiving a definition of a buffer region with respect to a selected customer site;
4 querying the database to determine NSP network infrastructure located within the
5 defined buffer region;
6 rendering the buffer region around the rendering of the selected customer site in
7 the map; and
8 rendering the determined NSP network infrastructure within the defined buffer
9 region in the map.

1 39. The article of manufacture of claim 38, wherein NSP network
2 infrastructure rendered within the defined buffer region is rendered differently than NSP
3 network infrastructure rendered outside of the buffer region.

1 40. The article of manufacture of claim 38, wherein the operations further
2 comprise:
3 generating a report identifying at least one of: the network infrastructure located
4 within the buffer region, the NSP managing the identified network infrastructure, and a
5 distance of the identified network infrastructure from the selected customer site for which
6 the buffer region is defined.

1 41. The article of manufacture of claim 31, wherein the network infrastructure
2 includes network switches and network paths, wherein rendering the representations of

3 the determined network infrastructure comprises rendering representations of the
4 determined switches in the map, further comprising:
5 querying the database to determine network paths between the network switches
6 rendered in the map; and
7 rendering the network paths between the network switches in the map.

1 42. The article of manufacture of claim 41, wherein the map comprises a
2 street map, and wherein the network paths are rendered superimposed over transportation
3 corridors rendered on the map.

1 43. The article of manufacture of claim 41, wherein the operations further
2 comprise:
3 receiving user selection of a proposed path between the customer site and one
4 network switch;
5 rendering the proposed path in the map; and
6 generating and rendering information on the proposed path in the map, including
7 information on the distance of the proposed path.

1 44. The article of manufacture of claim 31, wherein the operations further
2 comprise:
3 receiving selection of a plurality of customer sites rendered in the map;
4 receiving a definition of parameters of a buffer region with respect to the selected
5 customer sites;
6 determining buffer regions for each of the selected customer sites satisfying the
7 defined parameters for the buffer region;
8 querying the database to determine NSP network infrastructure located within
9 each determined buffer region;
10 rendering each determined buffer region around each selected customer site in the
11 map; and
12 rendering the determined NSP network infrastructure within each defined buffer
13 region in the map.

1 45. The article of manufacture of claim 44, wherein the operations further
2 comprise:
3 generating a report identifying at least one of: the network infrastructure located
4 within the determined buffer regions; the NSPs managing the identified network
5 infrastructure within the determined buffer regions; and, for each selected customer site, a
6 distance of the identified network infrastructure from the selected customer site within
7 the buffer region for the selected customer site.

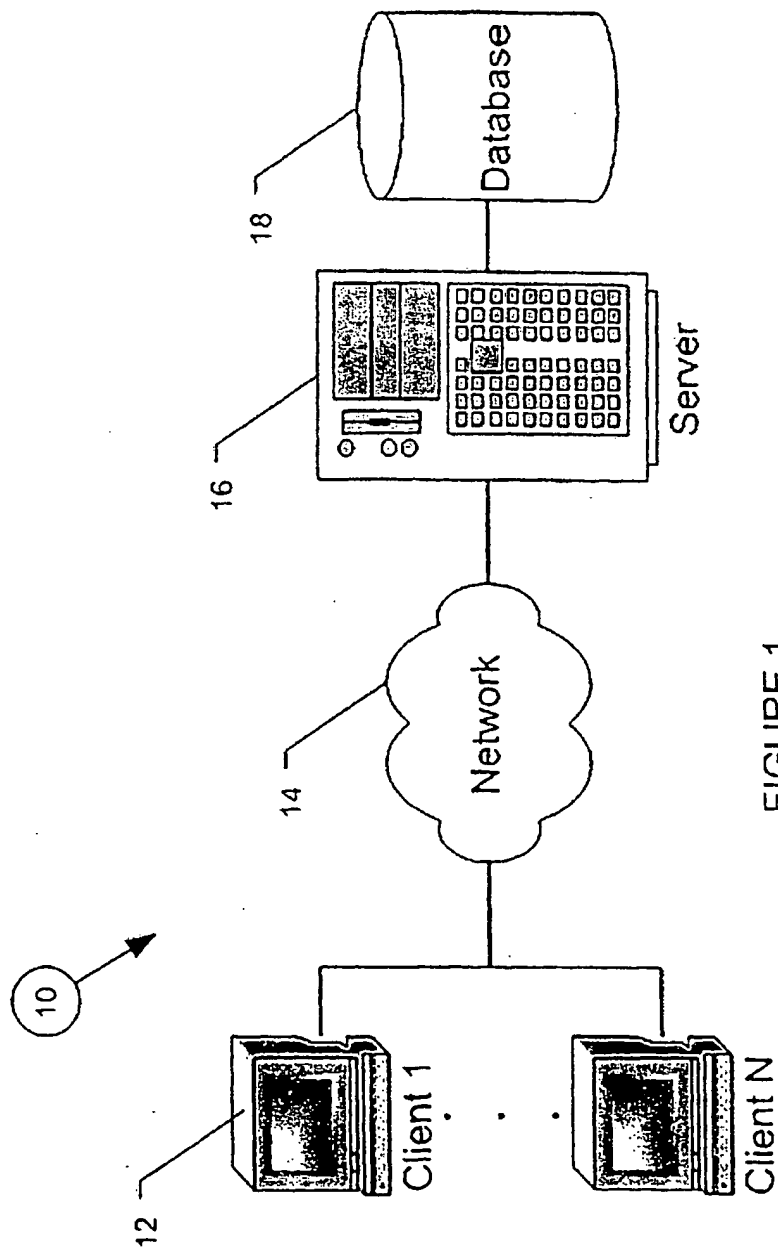


FIGURE 1

FIG. 2

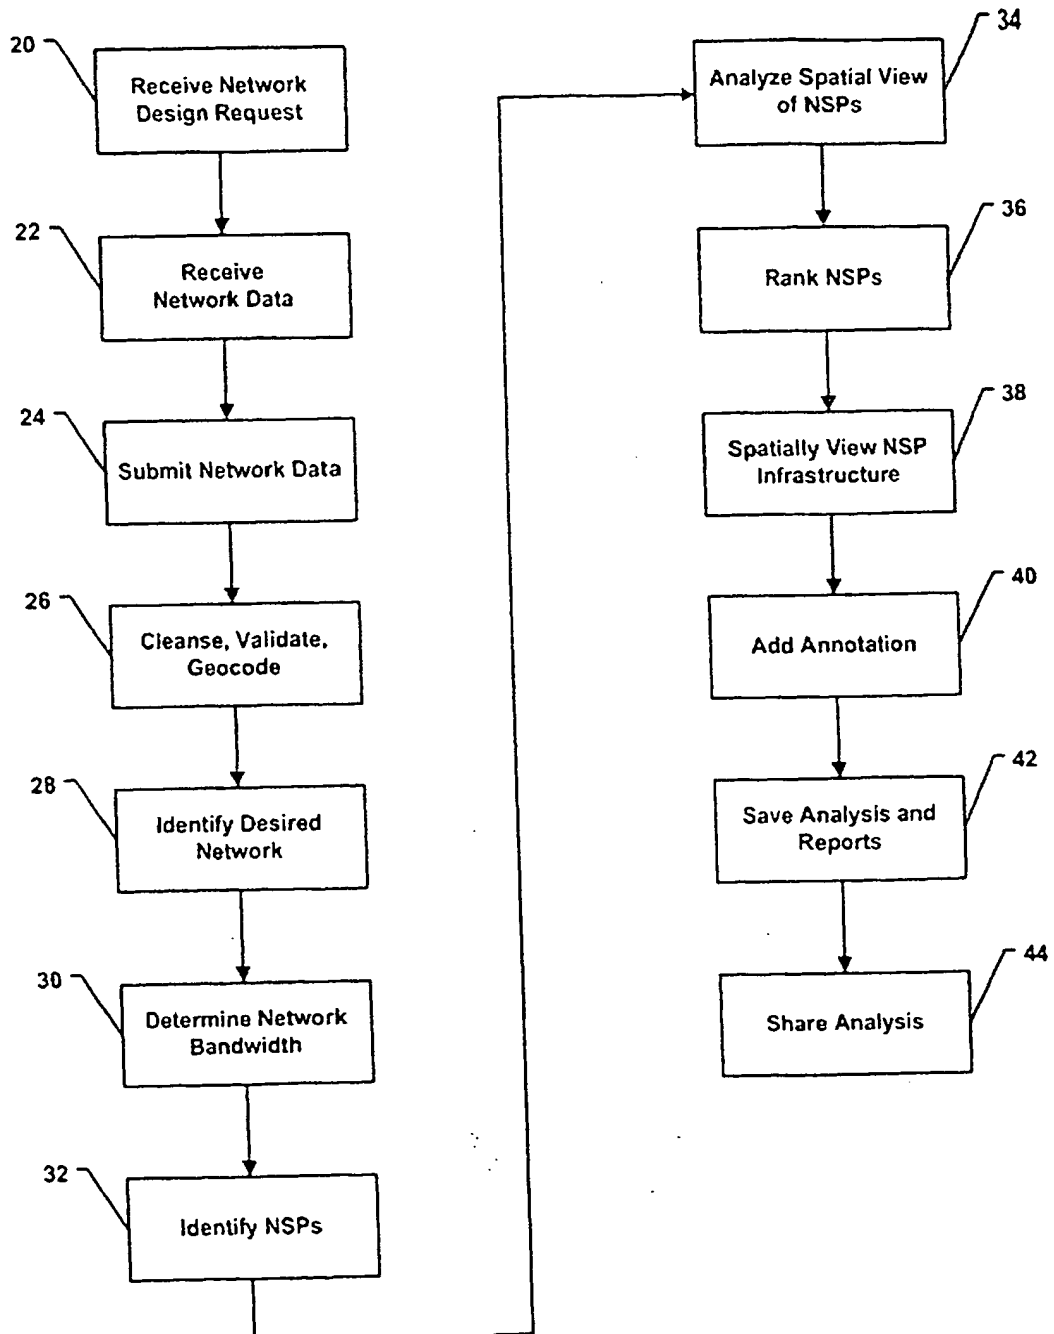


FIG. 3

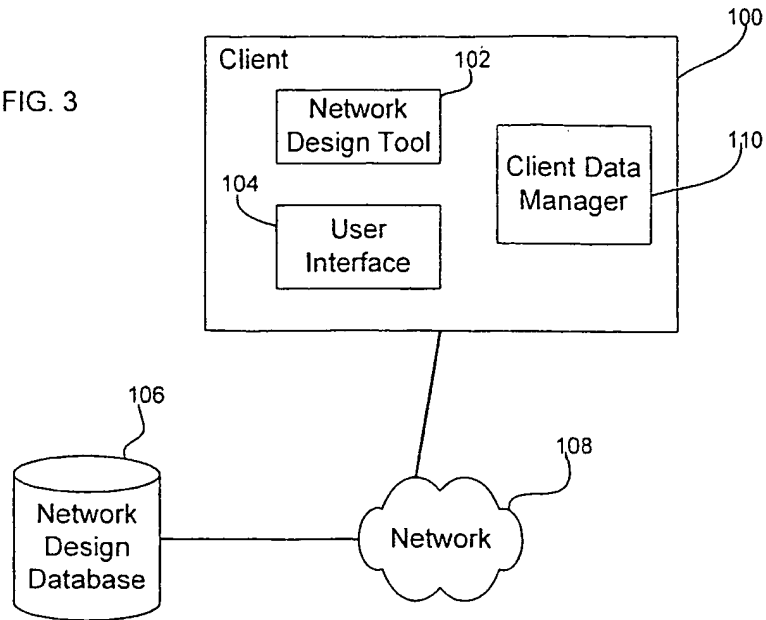


FIG. 4a

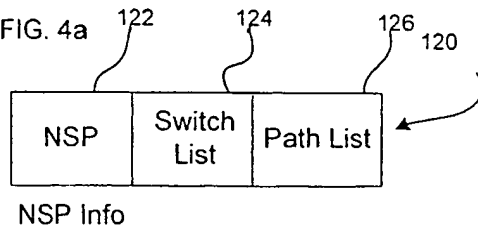


FIG. 4b

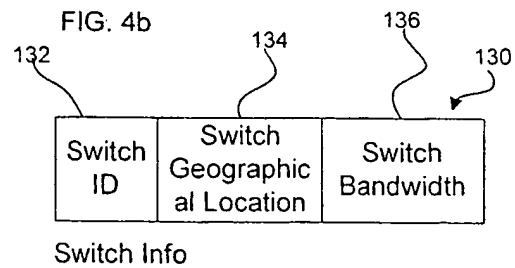
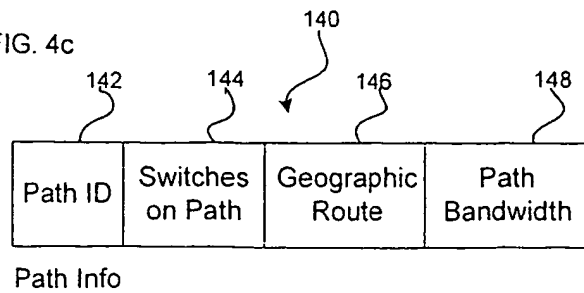
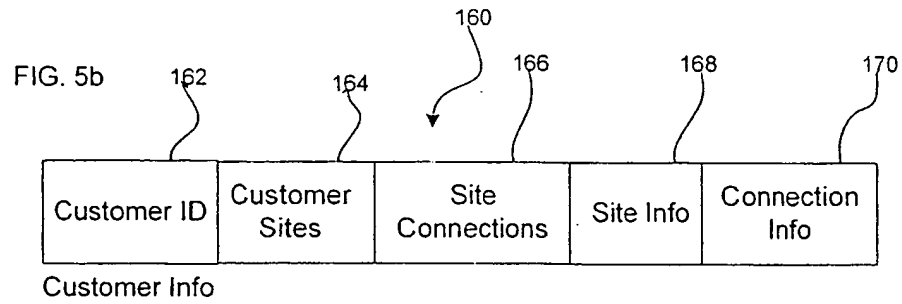
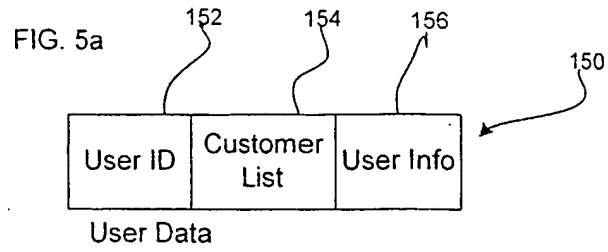


FIG. 4c





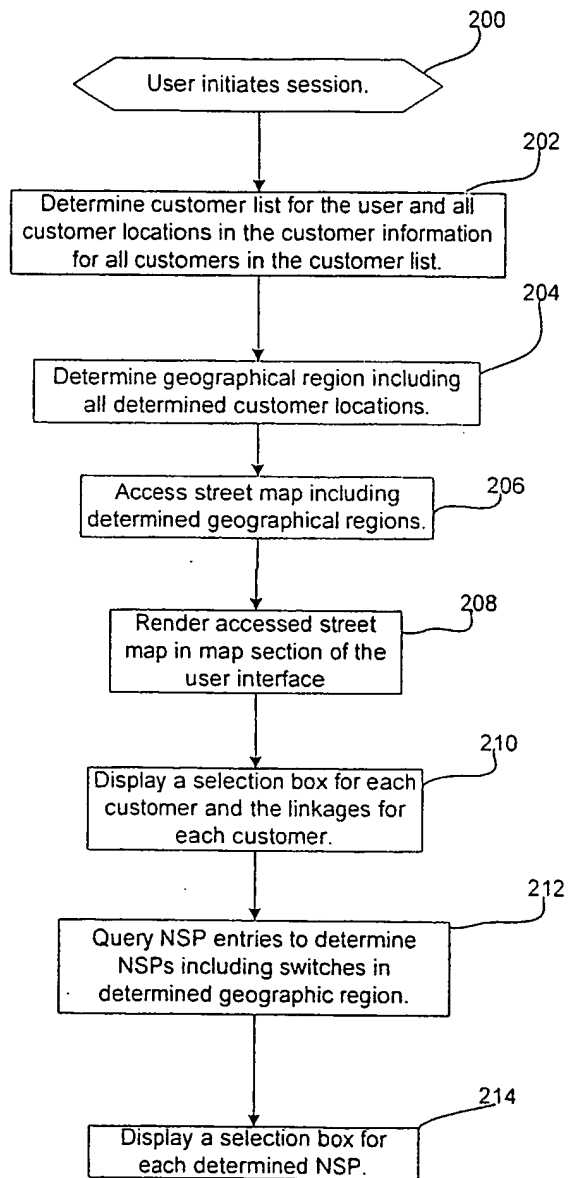


FIG. 6

FIG. 7


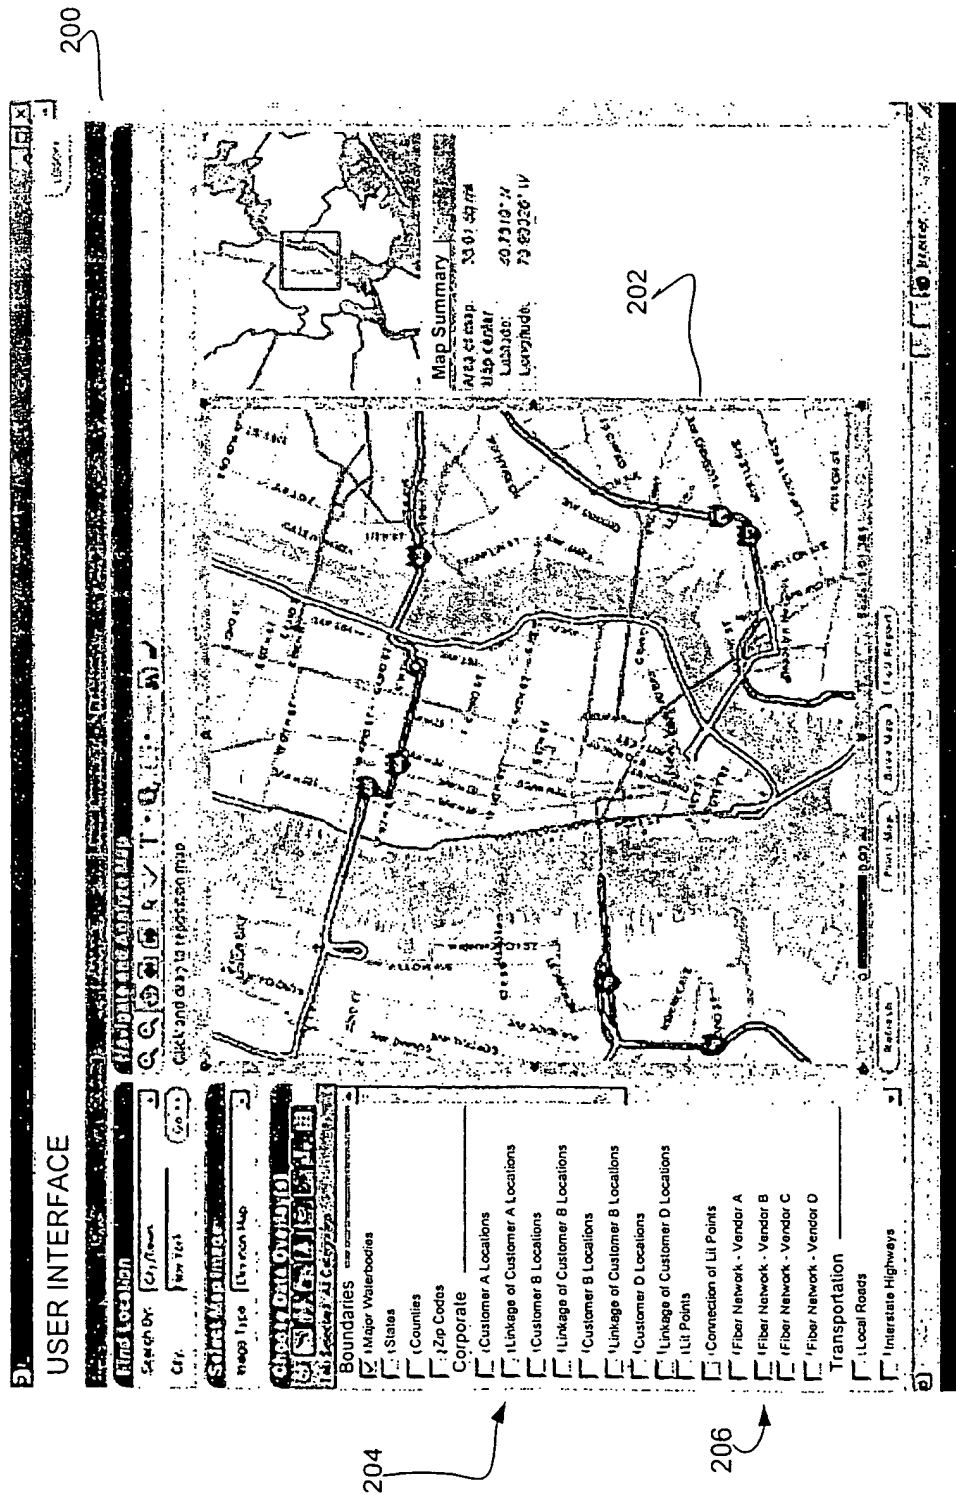


FIG. 8

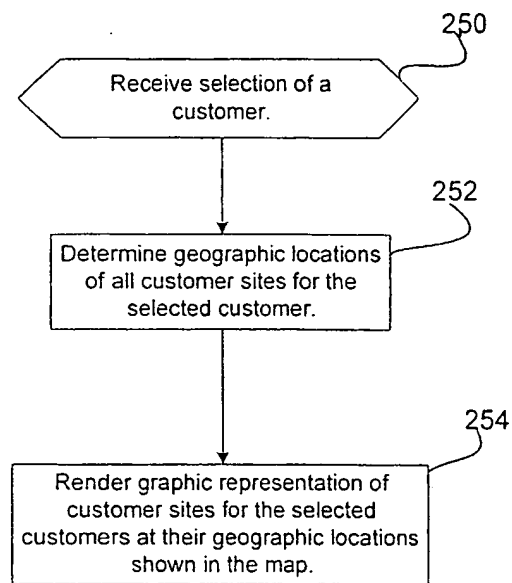

270

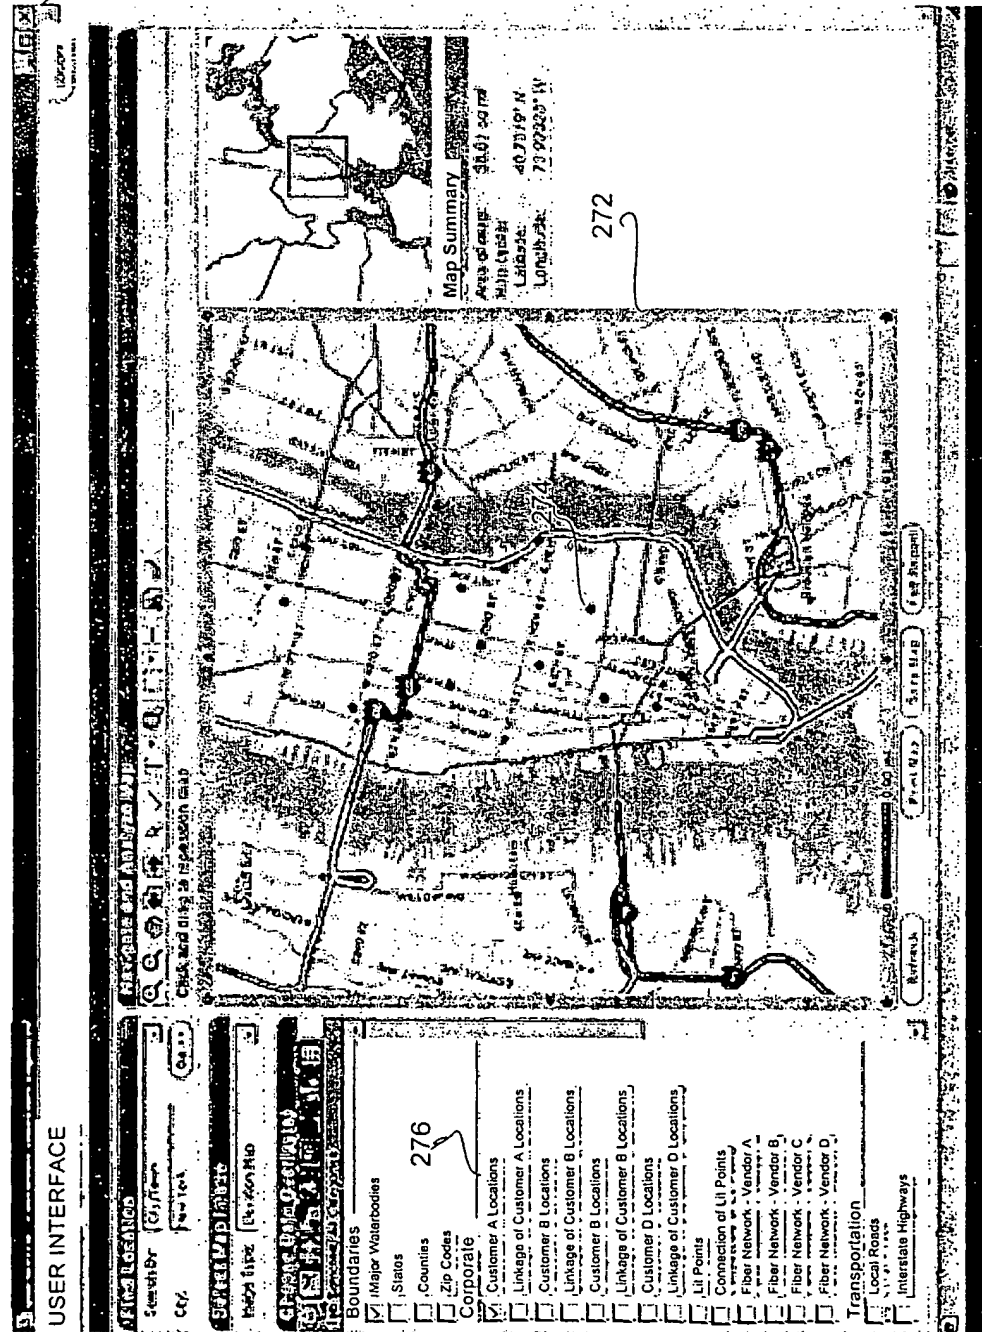


FIG. 10

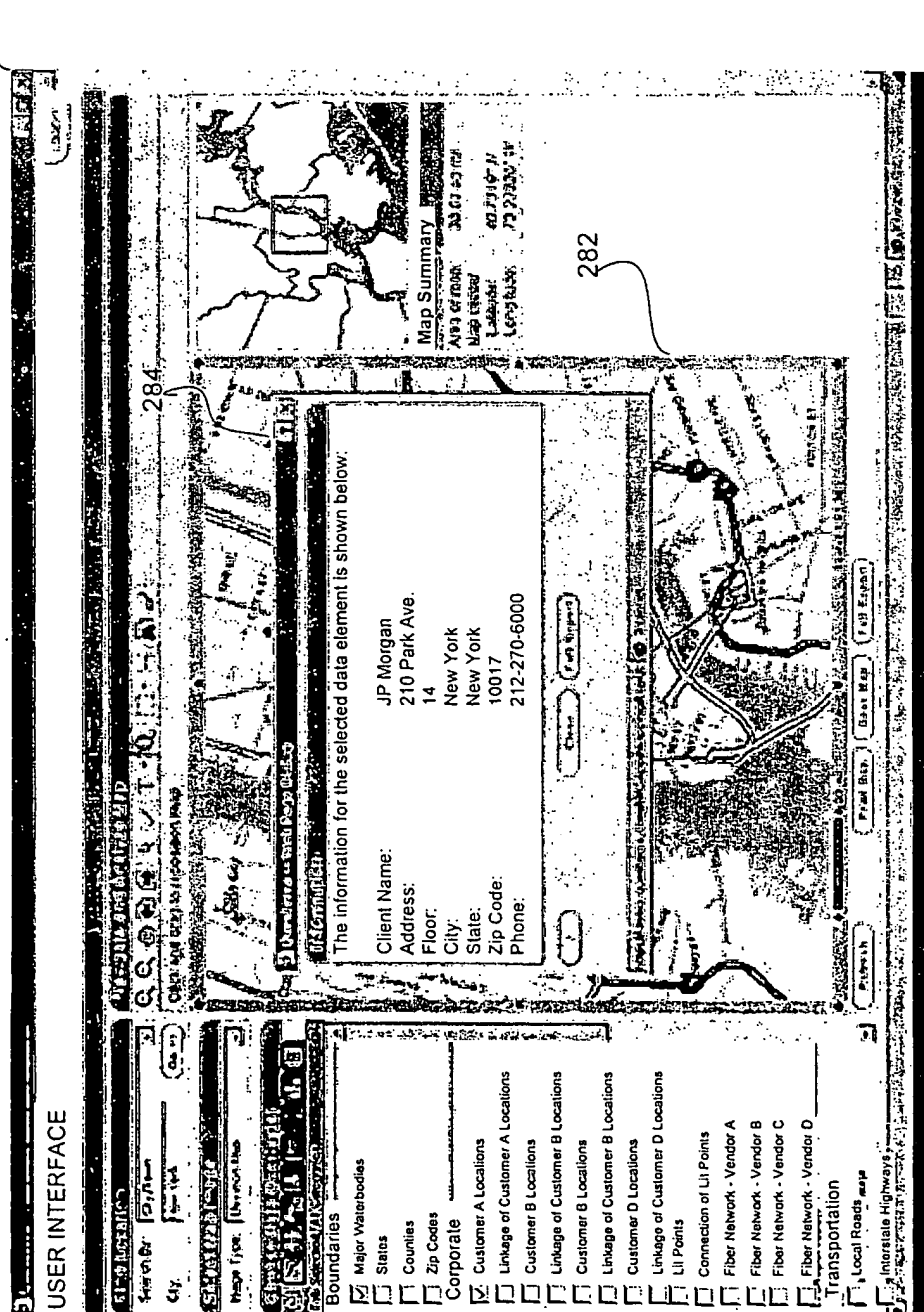
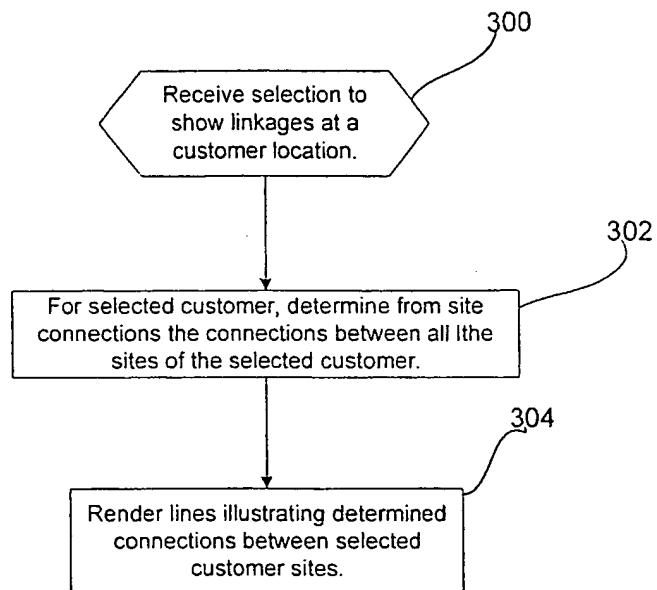


FIG. 11



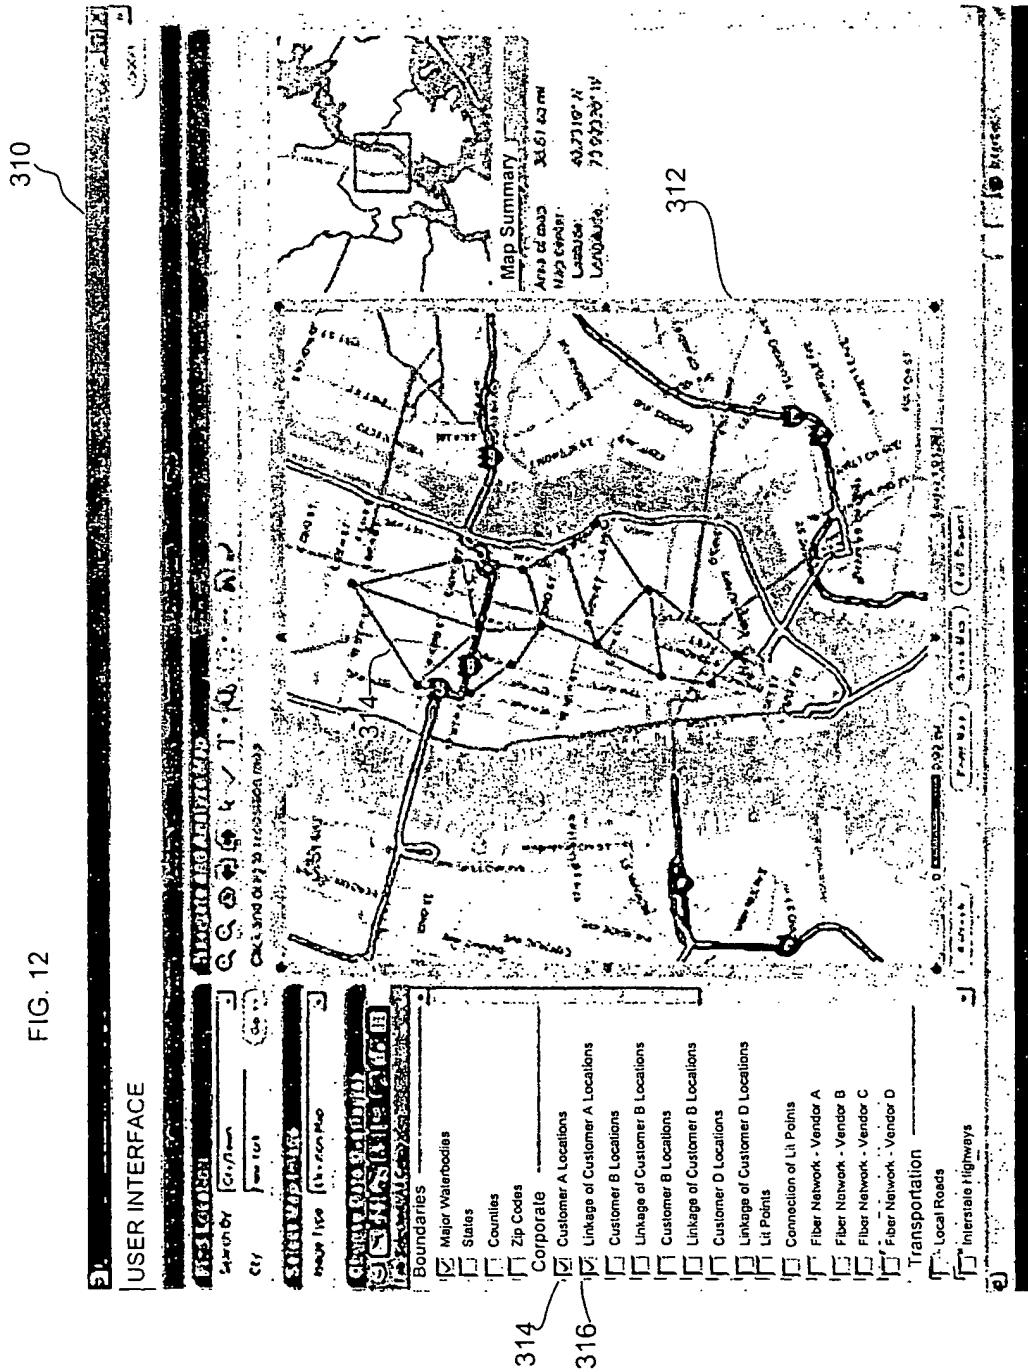


FIG. 13

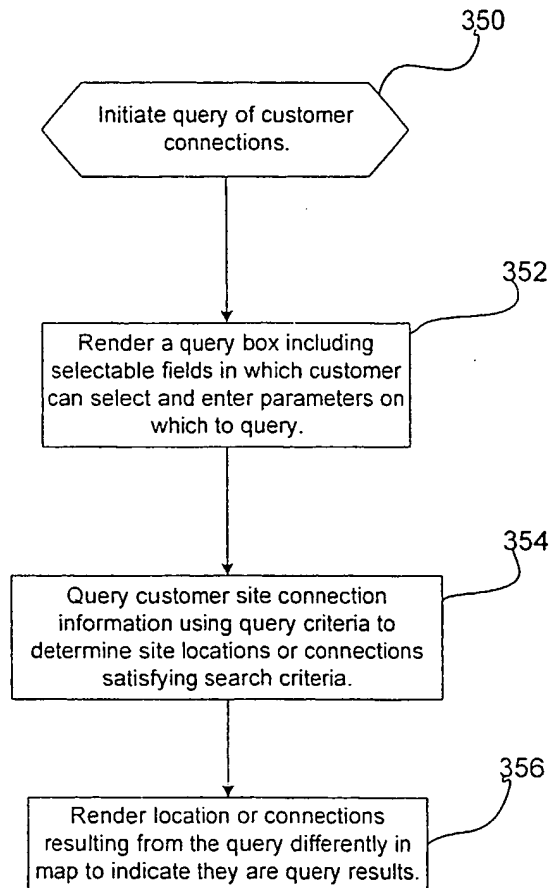


FIG. 14

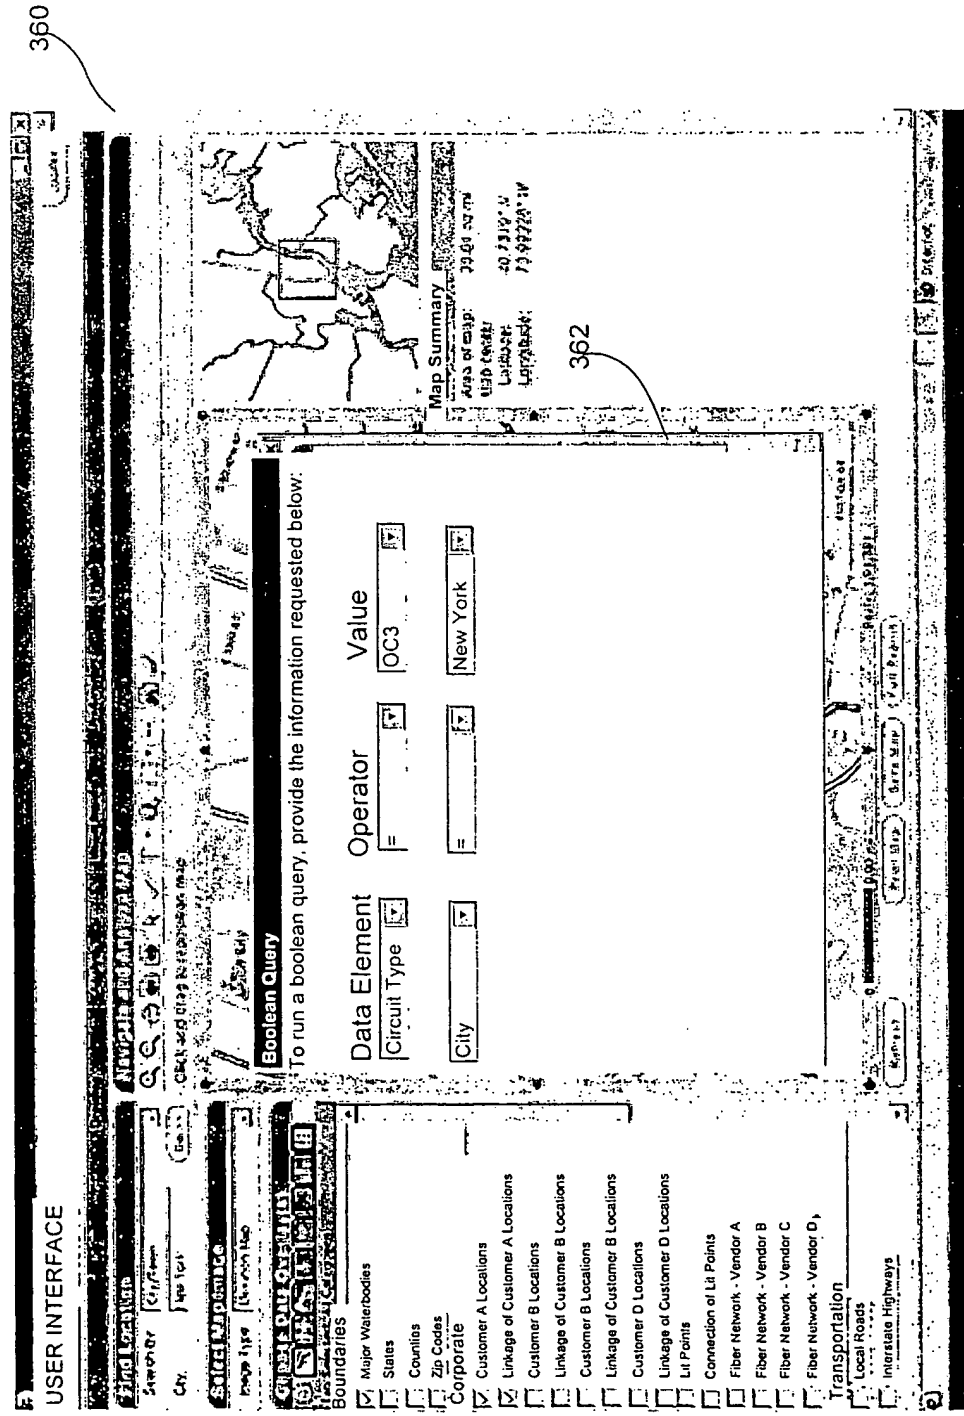
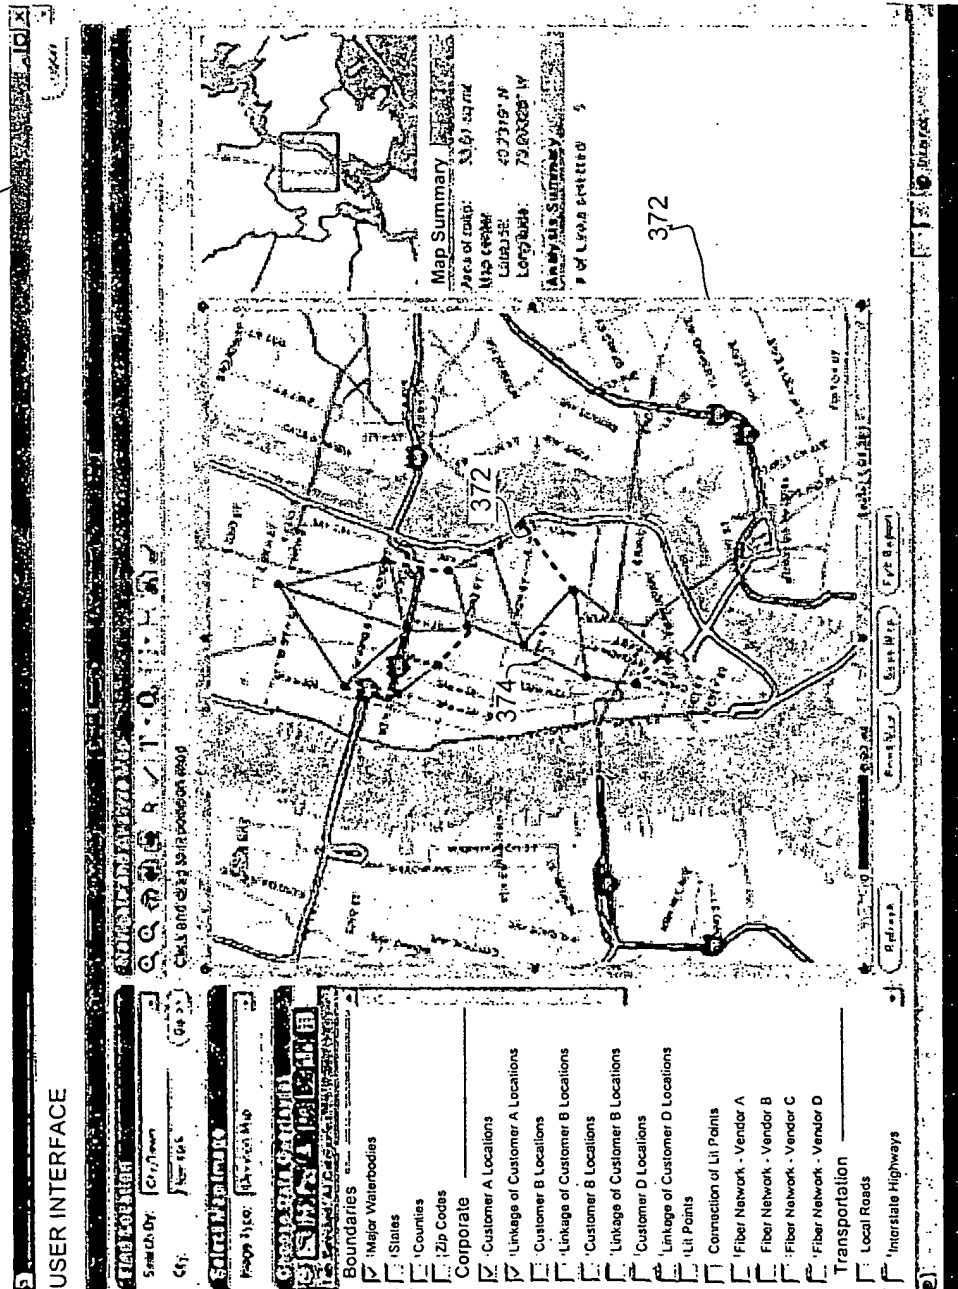


FIG. 15





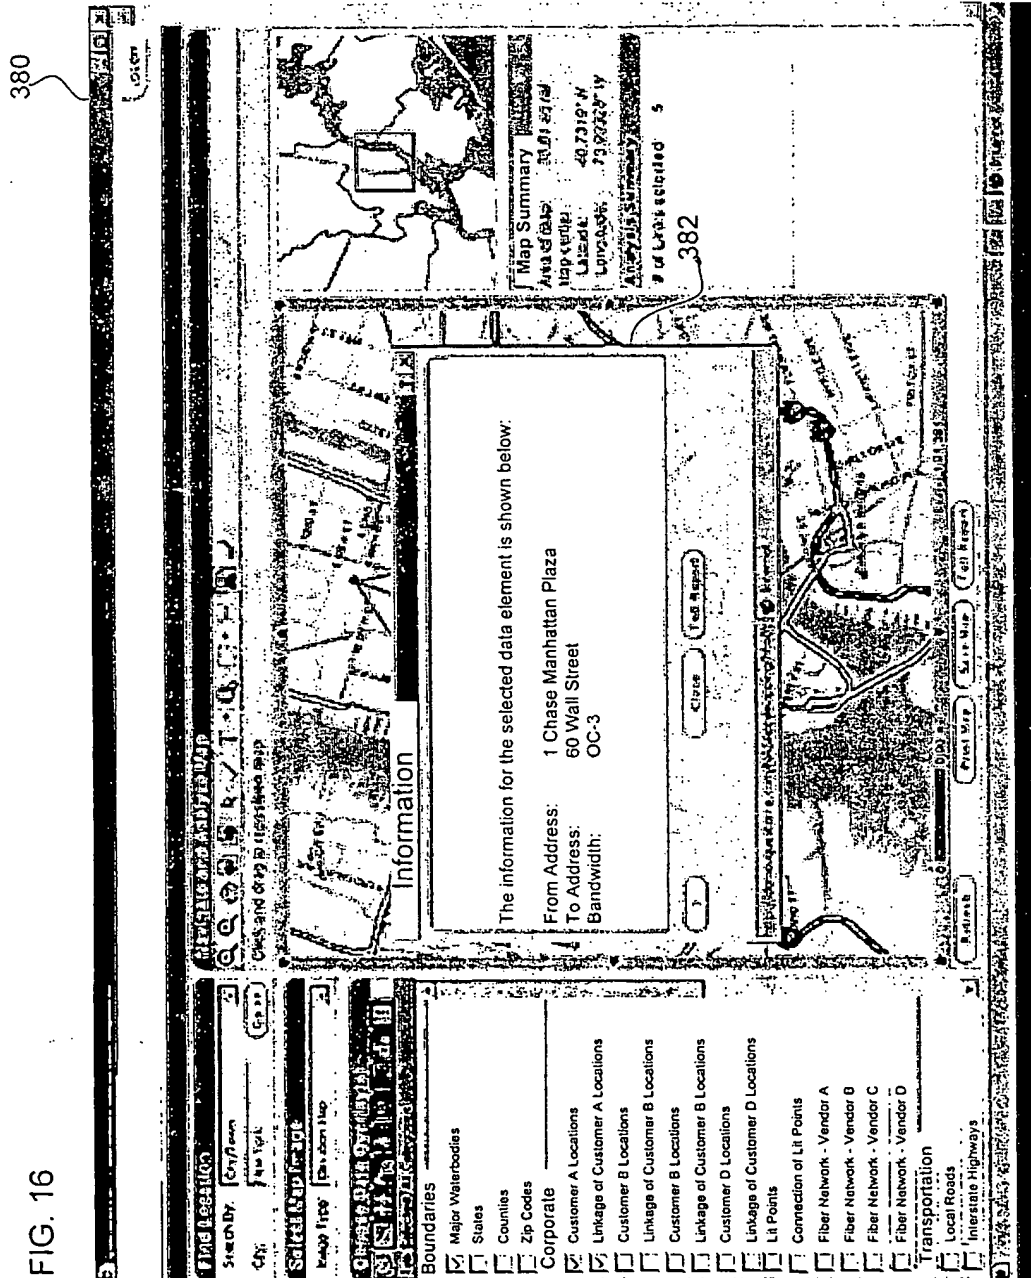


FIG. 17

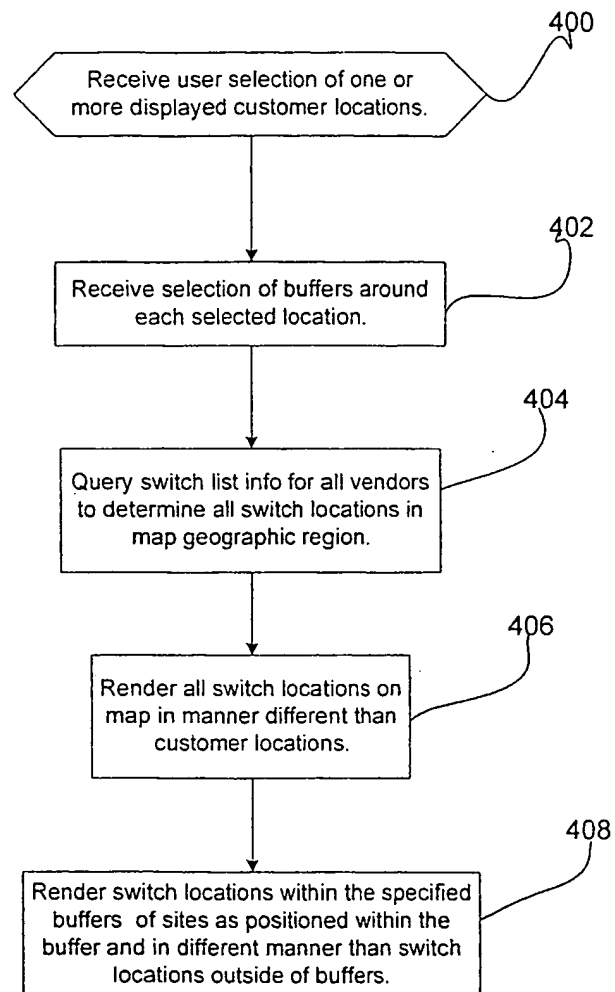


10/537715

FIG. 18

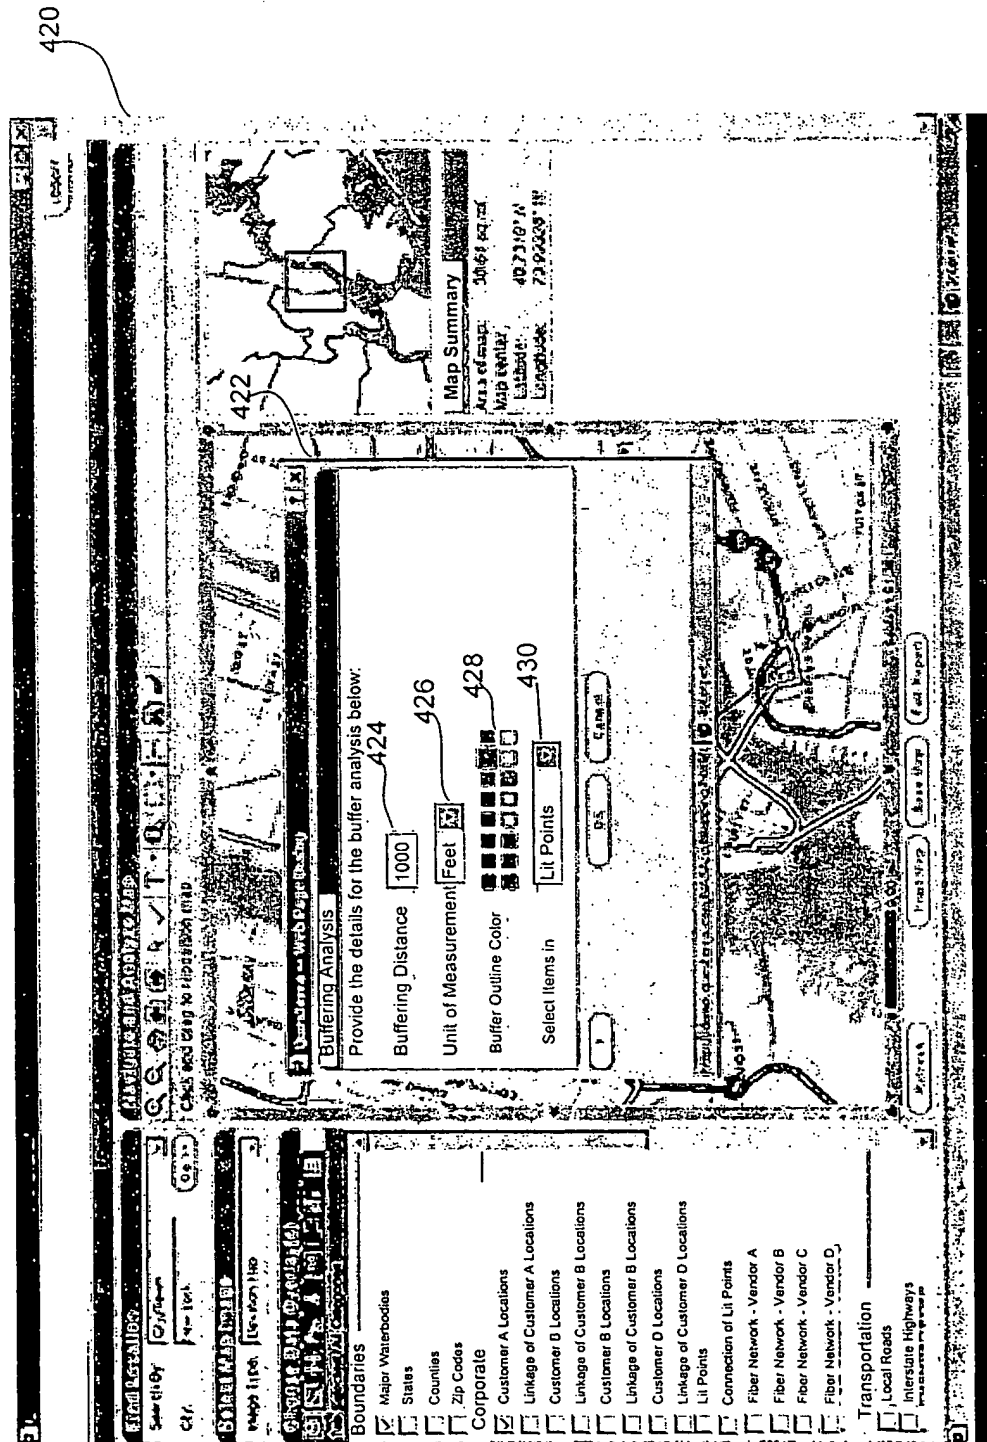

440

FIG. 19

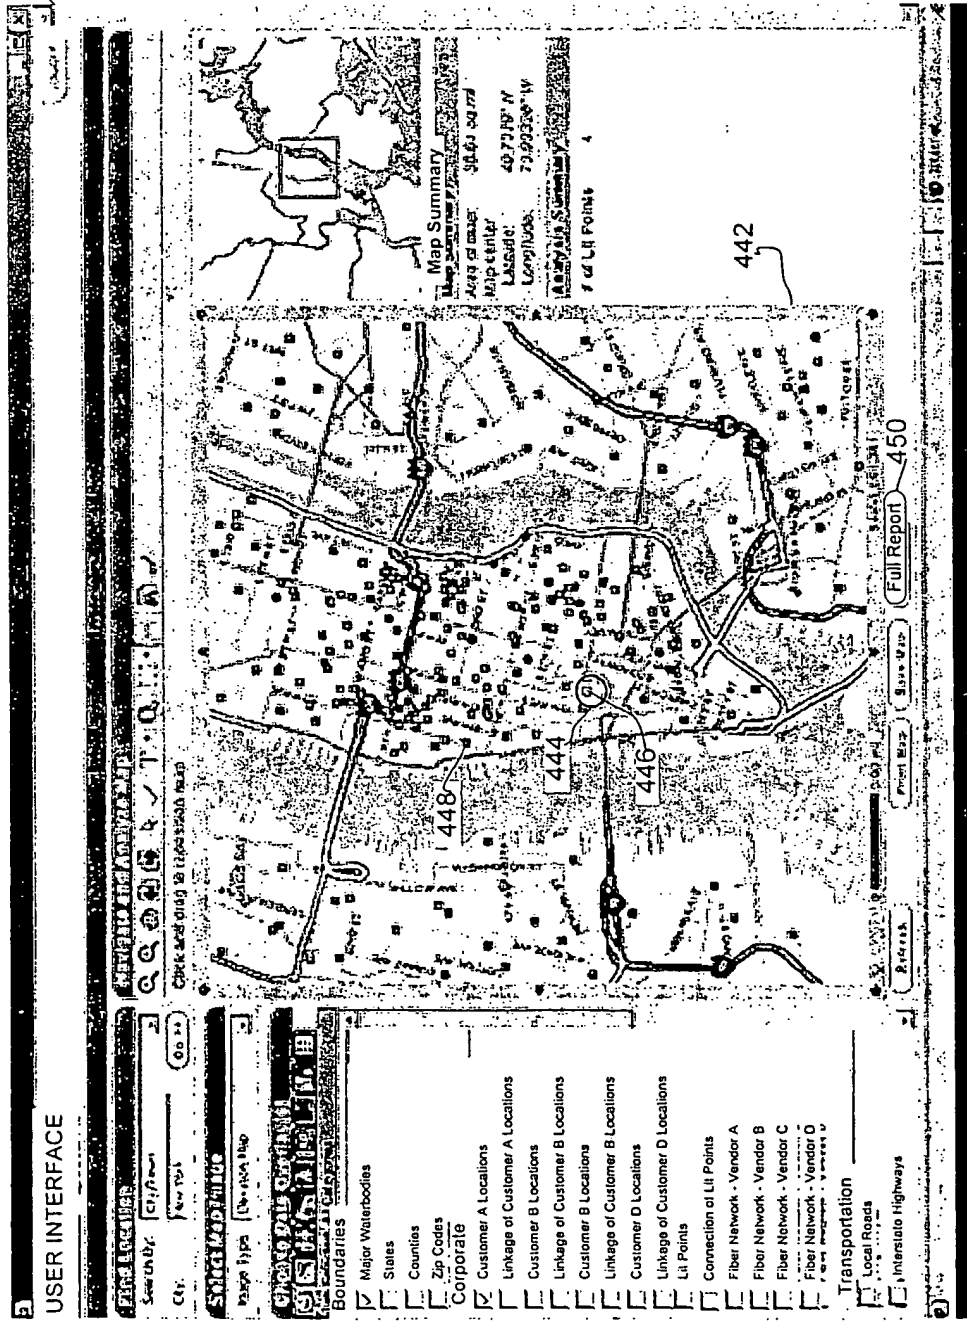

442

444

446

450

FIG. 20

460

USER INTERFACE

462

464

466

LINE	ORIGINATOR	ORIGIN	DEST	DEST	ORIGIN	DEST	ORIGIN	DEST	ORIGIN	DEST	ORIGIN	DEST
1	111-072	COCENT	AL	Mobile	FL	Mobile	FL	Mobile	FL	Mobile	FL	Mobile
2	111-073	COCENT	AL	Mobile	LA	Mobile	LA	Mobile	LA	Mobile	LA	Mobile
3	111-150	VERIZON-BELL	AR	Mobile	OK	Mobile	OK	Mobile	OK	Mobile	OK	Mobile
4	111-061	INTEL	AZ	Mobile	AZ	Mobile	AZ	Mobile	AZ	Mobile	AZ	Mobile

Print View Results on Map Export Close

FIG. 21

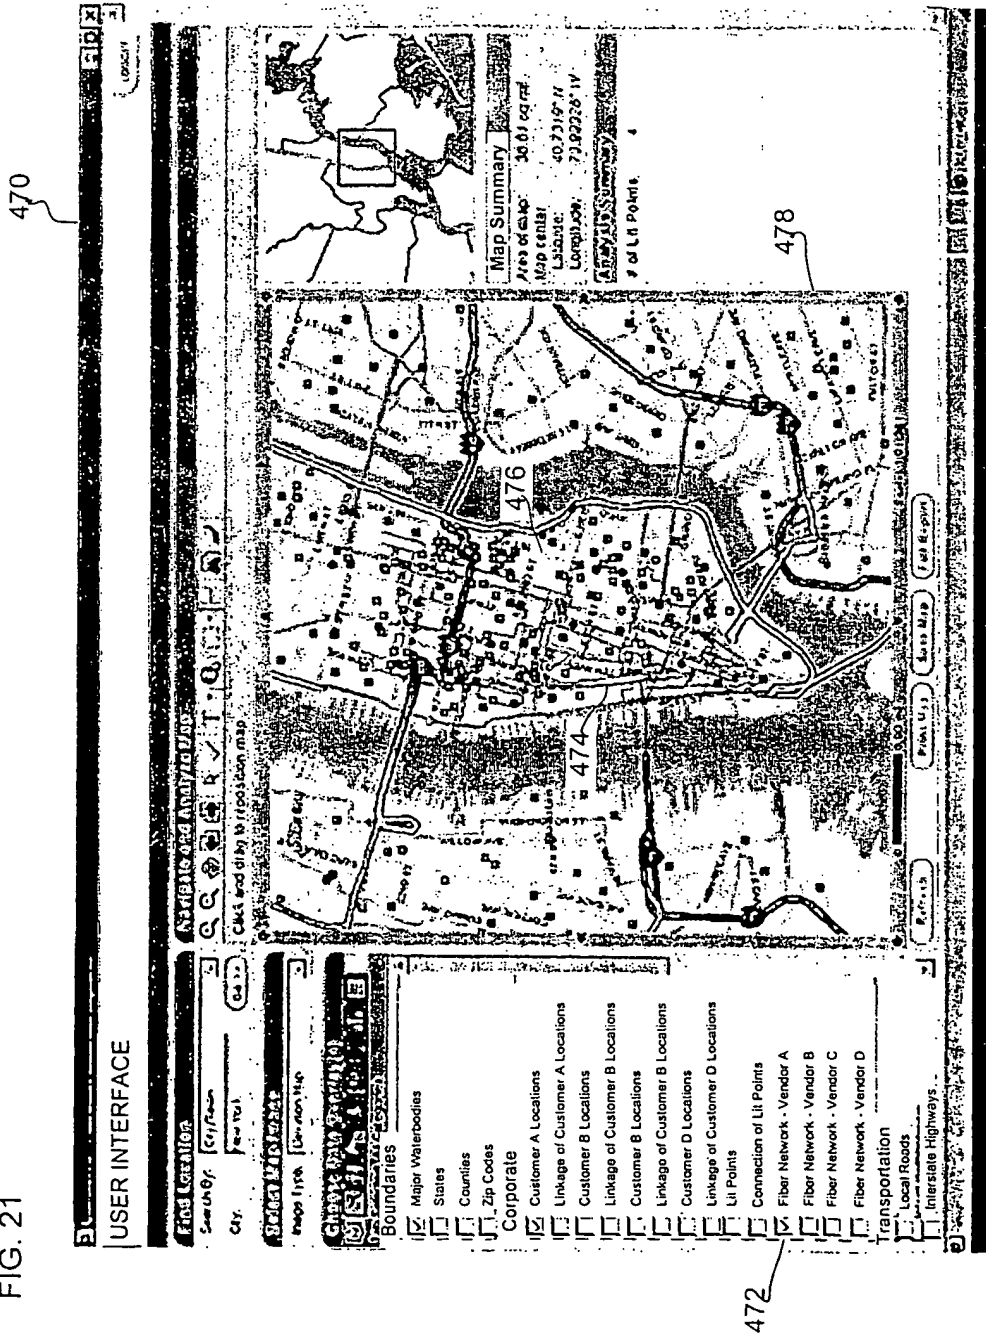


FIG. 22

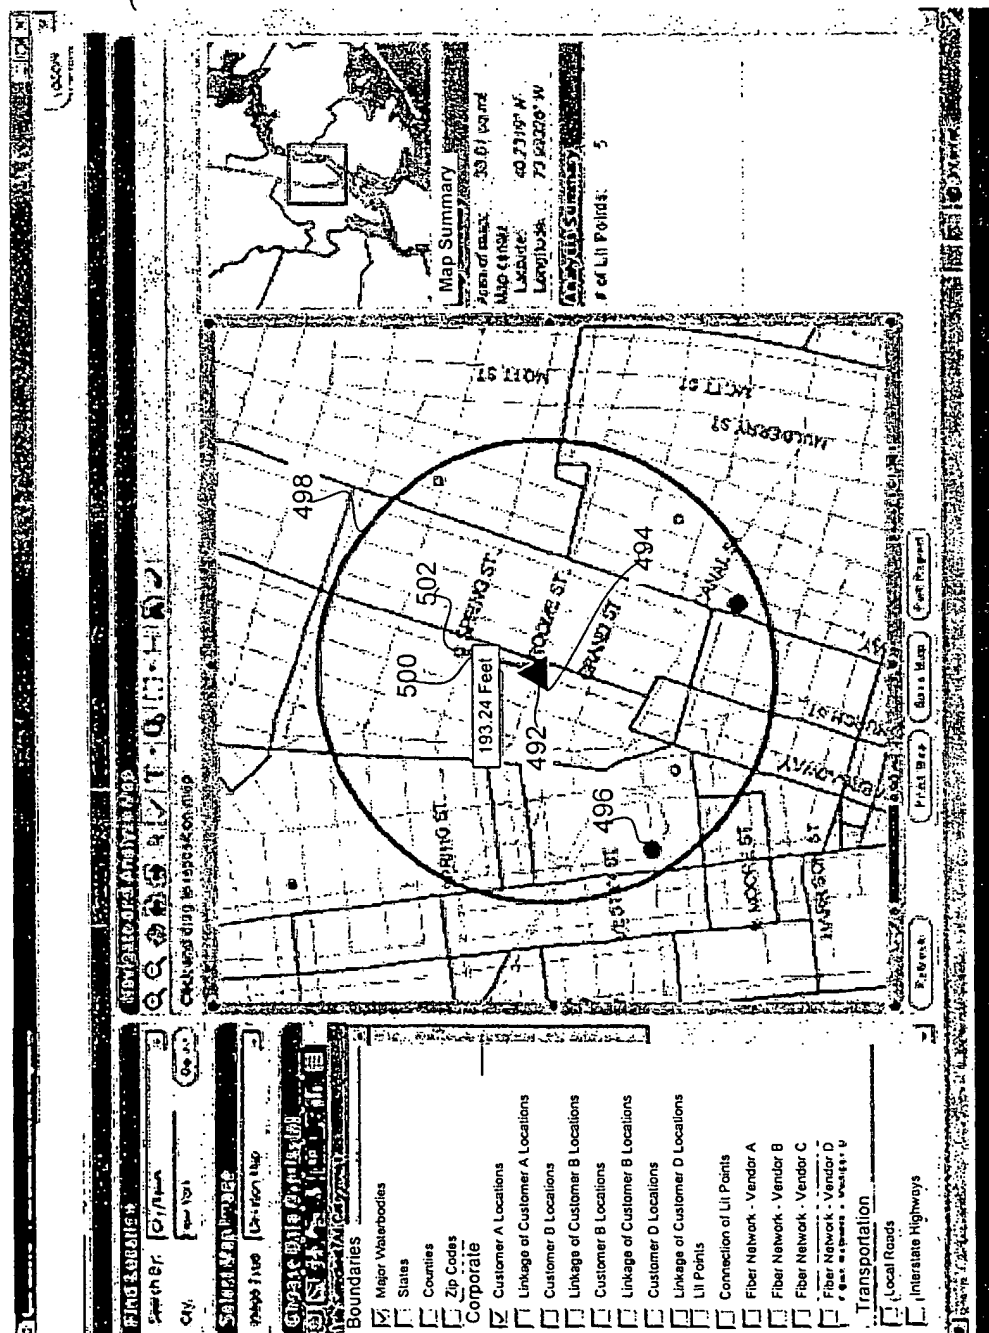


FIG. 23

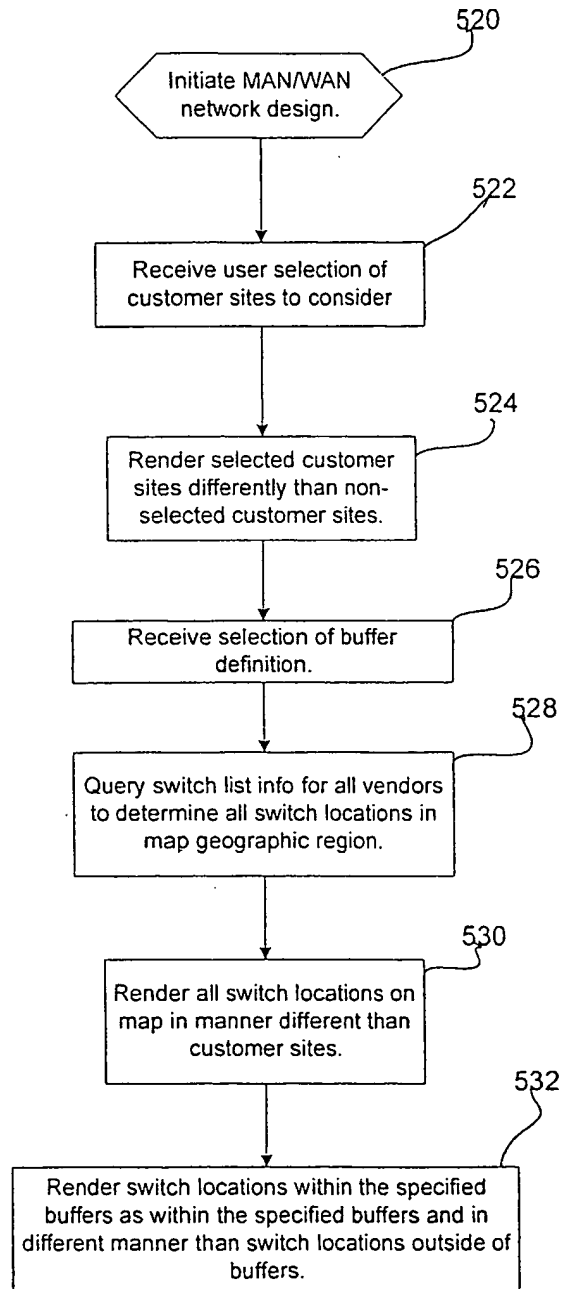


FIG. 24

550

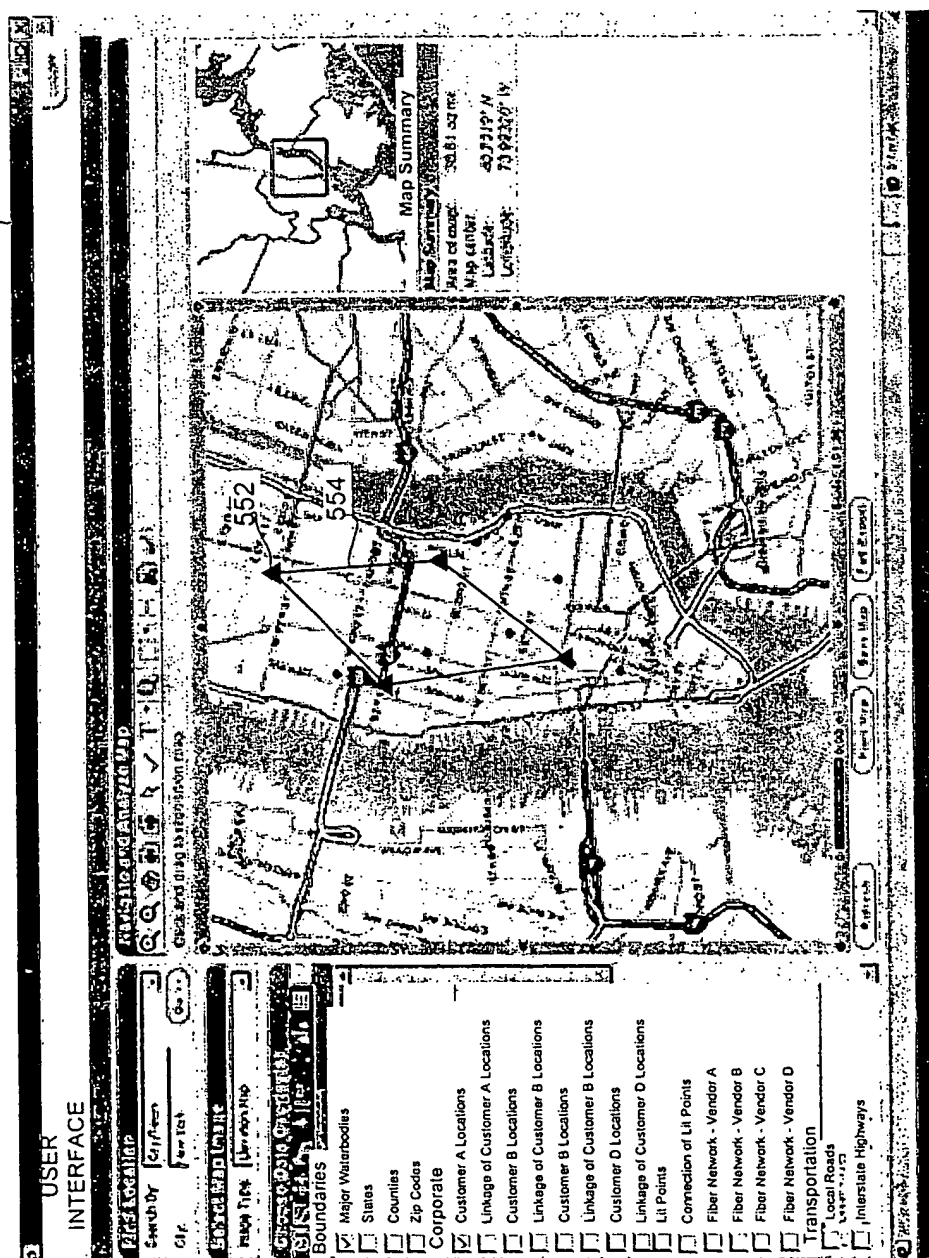


FIG. 25

560

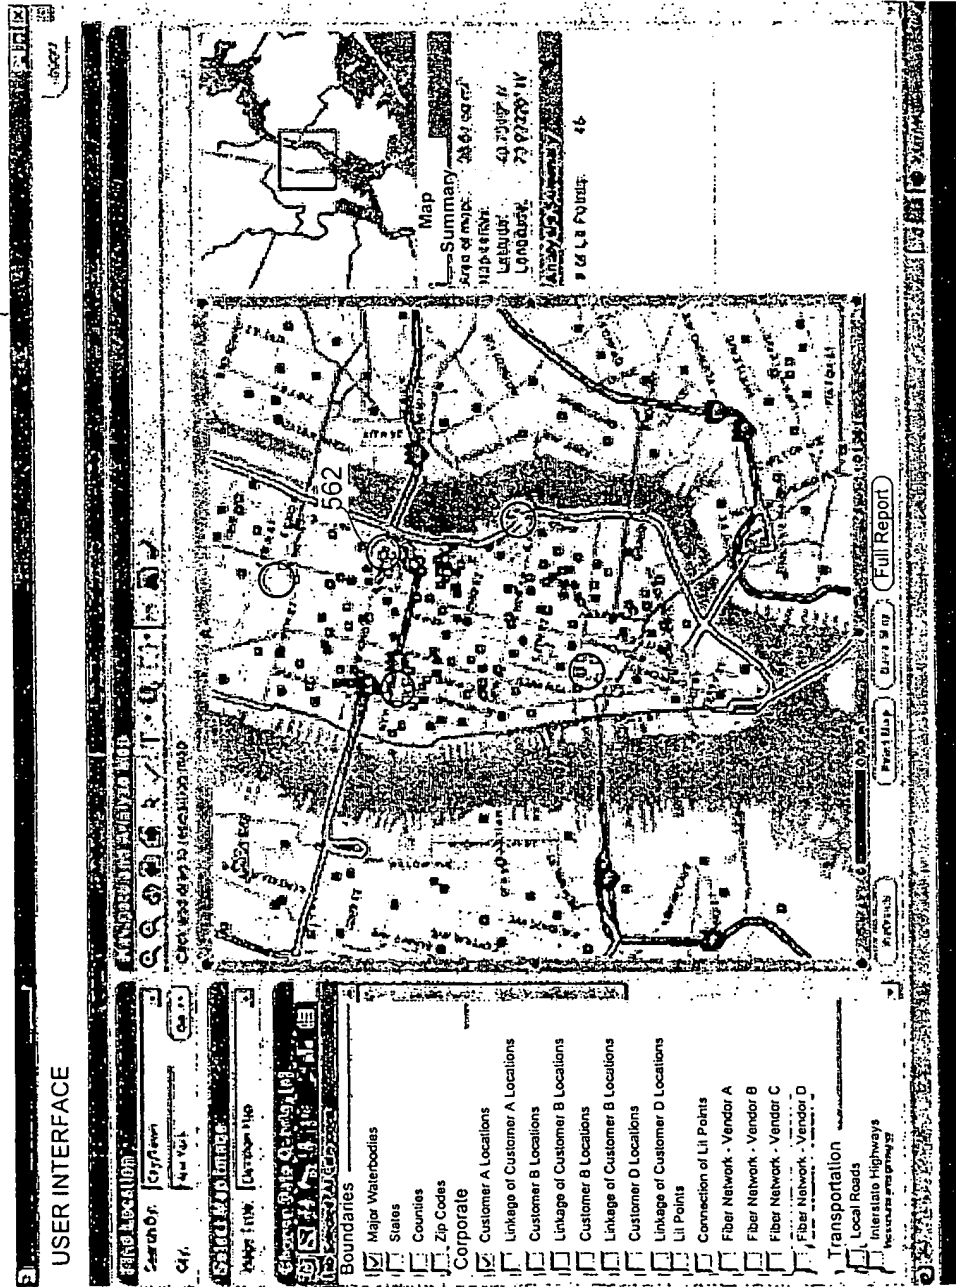


FIG. 26

570

USER INTERFACE

572

574

576

578

580

582

584

586

588

590

592

594

596

598

600

602

604

606

608

610

612

614

616

618

620

622

624

626

628

630

632

634

636

638

640

642

644

646

648

650

652

654

656

658

660

662

664

666

668

670

672

674

676

678

680

682

684

686

688

690

692

694

696

698

700

702

704

706

708

710

712

714

716

718

720

722

724

726

728

730

732

734

736

738

740

742

744

746

748

750

752

754

756

758

760

762

764

766

768

770

772

774

776

778

780

782

784

786

788

790

792

794

796

798

800

802

804

806

808

810

812

814

816

818

820

822

824

826

828

830

832

834

836

838

840

842

844

846

848

850

852

854

856

858

860

862

864

866

868

870

872

874

876

878

880

882

884

886

888

890

892

894

896

898

900

902

904

906

908

910

912

914

916

918

920

922

924

926

928

930

932

934

936

938

940

942

944

946

948

950

952

954

956

958

960

962

964

966

968

970

972

974

976

978

980

982

984

986

988

990

992

994

996

998

1000

1002

1004

1006

1008

1010

1012

1014

1016

1018

1020

1022

1024

1026

1028

1030

1032

1034

1036

1038

1040

1042

1044

1046

1048

1050

1052

1054

1056

1058

1060

1062

1064

1066

1068

1070

1072

1074

1076

1078

1080

1082

1084

1086

1088

1090

1092

1094

1096

1098

1100

1102

1104

1106

1108

1110

1112

1114

1116

1118

1120

1122

1124

1126

1128

1130

1132

1134

1136

1138

1140

1142

1144

1146

1148

1150

1152

1154

1156

1158

1160

1162

1164

1166

1168

1170

1172

1174

1176

1178

1180

1182

1184

1186

1188

1190

1192

1194

1196

1198

1200

1202

1204

1206

1208

1210

1212

1214

1216

1218

1220

1222

1224

1226

1228

1230

1232

1234

1236

1238

1240

1242

1244

1246

1248

1250

1252

1254

1256

1258

1260

1262

1264

1266

1268

1270

1272

1274

1276

1278

1280

1282

1284

1286

1288

1290

1292

1294

1296

1298

1300

1302

1304

1306

1308

1310

1312

1314

1316

1318

1320

1322

1324

1326

1328

1330

1332

1334

1336

1338

1340

1342

1344

1346

1348

1350

1352

1354

1356

1358

1360

1362

1364

1366

1368

1370

1372

1374

1376

1378

1380

1382

1384

1386

1388

1390

1392

1394

1396

1398

1400

1402

1404

1406

1408

1410

1412

1414

1416

1418

1420

1422

1424

1426

1428

1430

1432

1434

1436

1438

1440

1442

1444

1446

1448

1450

1452

1454

1456

1458

1460

1462

1464

1466

1468

1470

1472

1474

1476

1478

1480

1482

1484

1486

1488

1490

1492

1494

1496

1498

1500

1502

1504

1506

1508

1510

1512

1514

1516

1518

1520

1522

1524

1526

1528

1530

1532

1534

1536

1538

1540

1542

1544

1546

1548

1550

1552

1554

1556

1558

1560

1562

1564

1566

1568

1570

1572

1574

1576

1578

1580

1582

1584

1586

1588

1590

1592

1594

1596

1598

1600

1602

1604

1606

1608

1610

1612

1614

1616

1618

1620

1622

1624

1626

1628

1630

1632

1634

1636

1638

1640

1642

1644

1646

1648

1650

1652

1654

1656

1658

1660

1662

1664

1666

1668

1670

1672

1674

1676

1678

1680

1682

1684

1686

1688

1690

1692

1694

1696

1698

1700

1702

1704

1706

1708

1710

1712

1714

1716

1718

1720

1722

1724

1726

1728

1730

1732

1734

1736

1738

1740

1742

1744

1746

1748

1750

1752

1754

1756

1758

1760

1762

1764

1766

1768

1770

1772

1774

1776

1778

1780

1782

1784

1786

1788

1790

1792

1794

1796

1798

1800

1802

1804

1806

1808

1810

1812

1814

1816

1818

1820

1822

1824

1826

1828

1830

1832

1834

1836

1838

1840

1842

1844

1846

1848

1850

1852

1854

1856

1858

1860

1862

1864

1866

1868

1870

1872

1874

1876

1878

1880

1882

1884

1886

1888

1890

1892

1894

1896

1898

1900

1902

1904

1906

1908

1910

1912

1914

1916

1918

1920

1922

1924

1926

1928

1930

1932

1934

1936

1938

1940

1942

1944

1946

1948

1950

1952

1954

1956

1958

1960

1962

1964

1966

1968

1970

1972

1974

1976

1978

1980

1982

1984

1986

1988

1990

1992

1994

1996

1998

2000

2002

2004

2006

2008

2010

2012

2014

2016

2018

2020

2022

2024

2026

2028

2030

2032

2034

2036

2038

2040

2042

2044

2046

2048

2050

2052

2054

2056

2058

2060

2062

2064

2066

2068

2070

2072

2074

2076

2078

2080

2082

2084

2086

2088

2090

2092

2094

2096

2098

2100

2102

2104

2106

2108

2110

2112

2114

2116

2118

2120

2122

2124

2126

2128

2130

2132

2134

2136

2138

2140

2142

2144

2146

2148

2150

2152

2154

2156

2158

2160

2162

2164

2166

2168

2170

2172

2174

2176

2178

2180

2182

2184

2186

2188

2190

2192

2194

2196

2198

2200

2202

2204

2206

2208

2210

2212

2214

2216

2218

2220

2222

2224

2226

2228

2230

2232

2234

2236

2238

2240

2242

2244

2246

2248

2250

2252

2254

2256

2258

2260

2262

2264

2266

2268

2270

2272

2274

2276

2278

2280

2282

2284

2286

2288

2290

2292

2294

2296

2298

2300

2302

2304

2306

2308

2310

2312

2314

2316

2318

2320

2322

2324

2326

2328

2330

2332

2334

2336

2338

2340

2342

2344

2346

2348

2350

2352

2354

2356

2358

2360

2362

2364

2366

2368

2370

2372

2374

2376

2378

2380

2382

2384

2386

2388

2390

2392

2394

2396

2398

2400

2402

2404

2406

2408

2410

2412

2414

2416

2418

2420

2422

2424

2426

2428

2430

2432

2434

2436

2438

2440

2442

2444

2446

2448

2450

2452

2454

2456

2458

2460

2462

2464

2466

2468

2470

2472

2474

2476

2478

2480

2482

2484

2486

2488

2490

2492

2494

2496

2498

2500

2502

2504

2506

2508

2510

2512

2514

2516

2518

2520

2522

2524

2526

2528

2530

2532

2534

2536

2538

2540

2542

2544

2546

2548

2550

2552

2554

2556

2558

2560

2562

2564

2566

2568

2570

2572

2574

2576

2578

2580

2582

2584

2586

2588

2590

2592

2594

2596

2598

2600

2602

2604

2606

2608

2610

2612

2614

2616

2618

2620

2622

2624

2626

2628

2630

2632

2634

2636

2638

2640

2642

2644

2646

2648

2650

2652

2654

2656

2658

2660

2662

2664

2666

2668

2670

2672

2674

2676

2678

2680

2682

2684

2686

2688

2690

2692

2694

2696

2698

2700

2702

2704

2706

2708

2710

2712

2714

2716

2718

2720

2722

2724

2726

2728

2730

2732

2734

2736

2738

2740

2742

2744

2746

2748

2750

2752

2754

2756

2758

2760

2762

2764

2766

2768

2770

2772

2774

2776

2778

2780

2782

2784

2786

2788

2790

2792

2794

2796

2798

2800

2802

2804

2806

2808

2810

2812

2814

2816

2818

2820

2822

2824

2826

2828

2830

2832

2834

2836

2838

2840

2842

2844

2846

2848

2850

2852

2854

2856

2858

2860

2862

2864

2866

2868

2870

2872

2874

2876

2878

2880

2882

2884

2886

2888

2890

2892

2894

2896

2898

2900

2902

2904

2906

2908

2910

2912

2914

2916

2918

2920

2922

2924

2926

2928

2930

2932

2934

2936

2938

2940

2942

2944

2946

2948

2950

2952

2954

2956

2958

2960

2962

2964

2966

2968

2970

2972

2974

2976

2978

2980

2982

2984

2986

2988

2990

2992

2994

2996

2998

3000

3002

3004

3006

3008

3010

3012

3014

3016

3018

3020

3022

3024


3026

3028

3030

3

FIG. 27

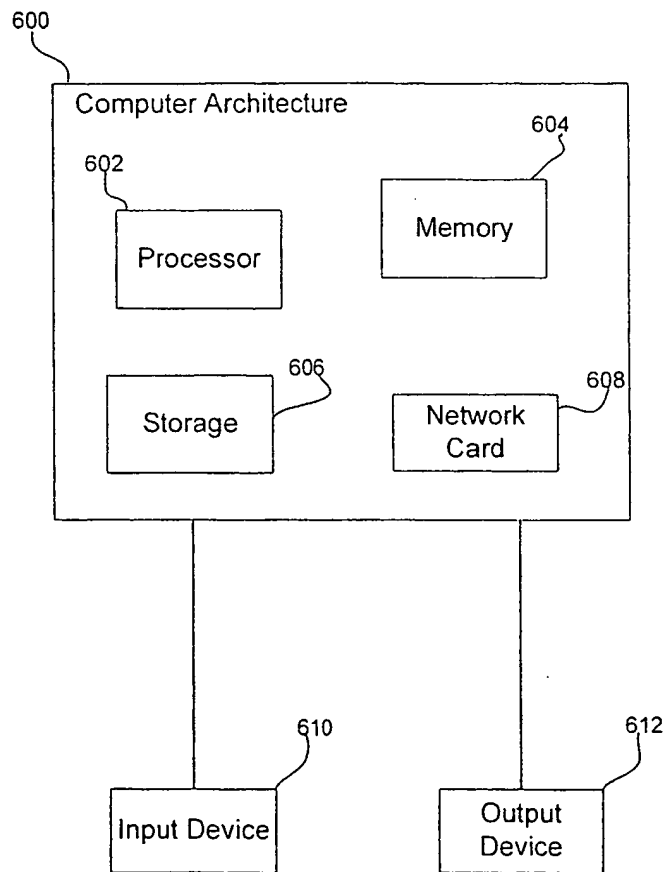

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.